RE 20478

Edition: 2020-12 Replaces: 2017-12



Prefill valve

Types ZSF and ZSFW



- ▶ Size 32 ... 200
- ► Component series 1X; 2X
- ► Maximum operating pressure 350 bar
- ► Maximum flow 7000 l/min (**Δp** = 0.3 bar)

Features

- ▶ Pilot operated check valve in sandwich plate design
- ► Directional valve set-up, optional
- ► High-pressure connection (NG32 ... 160)
- ► Integrated throttle check valve (standard)
- ► Throttle check valve can be retrofitted by specifying "D00" in the type key

Contents

Features	1
Ordering code	2
Symbols	3
Nozzle fitting	3
Function, section	4, 5
Technical data	6
Characteristic curves	7, 8
Dimensions	9 14
Dimensional proposal for counterflange	14
Poppet geometry and minimum pilot pressure	15
Flow for the different cases of application	16
Valve mounting screws, counterflanges	17
Throttle check valve (retrofitting)	17
Additional functions with special numbers	18
Further information	18

Ordering code

ZSI	02	03 (0 0	0	0	06		07			80		09		10		11						
	F 🔠		F () T	- T ·	1	_		1	T	M	/		Т		Π	*						
	-												-					'					
01	Prefill v	alve, sa	ndwich	plate	desig	gn																	ZSF
•	4:1																						
o2	tional va Withou			trol)																			no code
02		orting p			rding t	to IS	0.44	01)															W
	WILLI (F	or tillig p	attern	accor	unig t	10 13	0 44	01)															
03	Size 32																						32
	Size 40																						40
	Size 50																						50
	Size 63																						63
	Size 80																						80
	Size 10																					_	100
	Size 12																					_	125
	Size 16																					+	160
	Size 20	J																					200
/pe	of conn	ection																					
04	Flange	connect	ion																				F
)5	Withou	pre-de	compre	ession) (with	n pre	e-dec	ompre	essio	n u	non	reque	est)										0
			· ·		. (******	. p. o		op.			ро		-										
	king pres			pet																			
06	p _C app	rox. 0.1	2 bar																				1
07	Compo	nent ser	ies 10 .	19 ((10	19: ı	ıncha	ngad															
								ingeu	ınsta	alla	tion a	and c	onne	ctio	n dir	me	nsio	ons) -	– NG32	100	and NG1	60	1X
	Compo	nent ser	ies 20																		and NG1 and 200	60	1X 2X
				29	(20	. 29:	uncl	nange	d ins	stal	latio	n and	con	nec	tion	dir						60	
	material	(observ	e com	29 patibi	(20	. 29:	uncl	nange	d ins	stal	latio	n and	con	nec	tion	dir						60	2X
	material NBR se	(observals (pref	e com	29 patibi	(20	. 29:	uncl	nange	d ins	stal	latio	n and	con	nec	tion	dir						60	2X M
	material	(observals (pref	e com	29 patibi	(20	. 29:	uncl	nange	d ins	stal	latio	n and	con	nec	tion	dir						60	2X
80	material NBR se FKM se	(observals (pref	re com	29 patibi type)	(20 lity of	. 29:	: uncl	hange th hyd	d ins	ic fl	latio	n and	con	nec	tion	dir						60	2X M
08 orts	material NBR se FKM se (P and Pipe th	(observals (prefals X)	re com	29 patibi type)	(20 lity of O 228	. 29: sea	unch ls wit	nange th hyc	d insdrauli	ic fl	latio	n and	see	pag	e 6)	dir	mens	sions	s) – NG			60	2X M
08 orts	material NBR se FKM se (P and Pipe th	(observals (pref	re com	29 patibi type)	(20 lity of O 228	. 29: sea	unch ls wit	nange th hyc	d insdrauli	ic fl	latio	n and	see	pag	e 6)	dir	mens	sions	s) – NG			50	M V
08 orts 09	material NBR se FKM se (P and Pipe th	(observals (prefals (re com	29 patibi type) to ISo	(20 lity of O 228	. 29: sea 3-1 (p	unch ls wit prefe	nange th hyc	d insdrauli	ic fl	latio	n and	see	pag	e 6)	dir	mens	sions	s) – NG			60	2X M V
orts 09	material NBR se FKM se (P and Pipe th Thread	(observals (prefals (ve complete cording	29 patibi type) to ISo	(20 lity of O 228 g to AN	. 29: sea 3-1 (p NSI/A	unch ls wit prefe	th hydrace tred to B 1.	d insdrauli ype) 1 (no	ic fl	latio	n and	see	pag	e 6)	dir	mens	sions	s) – NG			60	2X M V
orts 09	material NBR se FKM se (P and Pipe th Thread	(observals (prefals X) read acc "UNF/UI (see als	ve complete cording	29 patibi type) to ISo	(20 lity of O 228 g to AN	. 29: sea 3-1 (p NSI/A	unch ls wit prefe	th hydrace tred to B 1.	d insdrauli ype) 1 (no	ic fl	latio	n and	see	pag	e 6)	dir	mens	sions	s) – NG			60	2X M V
orts 09	material NBR se FKM se (P and Pipe th Thread Le fitting Type NG32	(observals (prefals X) read acc "UNF/UI (see als	re com ferred to cording N" acco so sym thout t	m 29 patibi type) to ISording bols controll	O 228g to AN	. 29: sea 3-1 (p NSI/A ge 3) ck va	unch ls with prefe ASME	rred to E B 1.	ype) 1 (no	ot N	lation	andused,	see	pag	e 6)	dir	mens	sions	s) – NG			60	2X M V 01 12
orts 09	material NBR se FKM se (P and Pipe th Thread Le fitting - Type NG32 Type	(observed als (prefals (prefal	re comferred for cording N" according thout the integral of the cordinate	29 patibi type) to ISo prding bols contil	O 228 O pag to AN On pag O throt	. 29: sea 3-1 (p NSI// ck va	preferance alve,	rred t B 1.	ype) 1 (no	ot N	lation	andused,	see	pag	e 6)	dir	mens	sions	s) – NG			60	2X M V 01 12
orts 09	material NBR se FKM se (P and Pipe th Thread Le fitting - Type NG32 Type NG32,4	(observals (prefals X) read acc "UNF/UI (see als ZSF (wi . 160 ZSF (wi	re comferred to cording N" according thout to the integral of the cordinate of the cordinat	29 patibi type) to ISo prding bols co hrottle grateco	O 228g to AN	. 29: seal	e unch	rred t B 1.	ype) 1 (no	ot N	lation	andused,	see	pag	e 6)	dir	mens	sions	s) – NG			60	2X M V 01 12
orts 09	material NBR se FKM se (P and Pipe th Thread Le fitting Type NG32 Type NG32,4 NG80,	(observated (obser	re comferred to cording N" accompany accompany thout the integral (three cottle class).	to ISoprding	O 228g to AN	. 29: sea s-1 (p NSI// ge 3) cck va tttle (: uncl lls wit pprefe ASME alve, check e Ø0.	rred t B 1.	ype) 1 (no	ot N	lation	andused,	see	pag	e 6)	dir	mens	sions	s) – NG			60	2X M V 01 12 D00 D08
orts 09	material NBR se FKM se (P and Pipe th Thread Le fitting Type NG32 Type NG32,4 NG80, NG125	(observated (obser	cording N" acco	to ISopration to	O 228 g to AN on page le check valve & valve & 21.2	. 29: sea s-1 (p NSI/# vslve valve valve valve valve	e words with the second	rred t B 1.	ype) 1 (no	ot N	lation	andused,	see	pag	e 6)	dir	mens	sions	s) – NG			60	2X M V 01 12 D00 D08 D10
orts 09	material NBR se FKM se (P and Pipe th Thread Le fitting Type NG32 Type NG32,4 NG80, NG125 NG160	(observated (obser	cording ording N" acco	to ISopreting	O 228 O 228 To AN On pag le check throt check valve & e & 1.2 e & 1.5	. 29: sea 3-1 (ge 3) yek valve valve ye mm	e words with the second	rred t B 1.	ype) 1 (no	ot N	lation	andused,	see	pag	e 6)	dir	mens	sions	s) – NG			60	D00 D08 D10 D12
orts 09	material NBR se FKM se (P and Pipe th Thread Le fitting Type NG32 Type NG32,4 NG80, NG125 NG160	(observated (observated als (prefated accompany) (see als 25F (wind a 160 25F (wind a 160 50, 6100 (throttle (throttle (throttle (throttle (throttle als (th	cording ording N" acco	to ISopreting	O 228 O 228 To AN On pag le check throt check valve & e & 1.2 e & 1.5	. 29: sea 3-1 (ge 3) yek valve valve ye mm	e words with the second	rred t B 1.	ype) 1 (no	ot N	lation	andused,	see	pag	e 6)	dir	mens	sions	s) – NG			60	D00 D08 D10 D12 D15
orts 09	material NBR se FKM se FKM se (P and Pipe th Thread - Type NG32 Type NG32, NG80, NG125 NG160 NG200 - Type	(observated (observated als (prefated accompany) (see als 25F (wind a 160 25F (wind a 160 50, 6100 (throttle (throttle (throttle (throttle (throttle als (th	cording cording N" according thout t th inter ottle cle checke check	to ISoprating bols of the check walves a valves	O 228g to AN On pag le check theck valve & e Ø1.2 e Ø1.5 e Ø4 m	3-1 (psi sea	prefeeckee Ø0.	rred t E B 1.	ype) 11 (no	ot N	G12	andused,	see	pag	e 6)	dir	mens	sions	s) – NG			60	D00 D08 D10 D12 D15
orts 09	material NBR se FKM se (P and Pipe th Thread Le fitting Type NG32. NG32. NG80, NG125 NG160 NG200 Type NG32.	(observated (observated als (prefated accompany) (see als 25F (with 40, 50, 6100 (throttle (throttle 25FW))	cording N" acco so sym thout t th integ octle checke checke cozzle i	to ISopretion to	O 228g to AN on pag le check valve & e & 1.2 e & 4 m onnel P	3-1 (gge 3) ck valve tttle (valve mmm) P inst	e unclis with the preference of the preference o	nanged the hydrogen the hydroge	ype) 1 (no	ot Not Notes	G12	andused,	see	pag	e 6)	dir	mens	sions	s) – NG			60	D00 D08 D10 D12 D15 D40


 $^{^{1)}}$ Compatible with series 1X

Symbols

Type ZSF

Without throttle check valve "D00"

NG32 ... 160






- ► Separate, external nozzle fitting required
- ▶ or retrofitting of a throttle check valve (for nozzle diameter, see below)


Older versions without name plate information "D00"

► Separate, external nozzle fitting required (for nozzle diameter, see below)

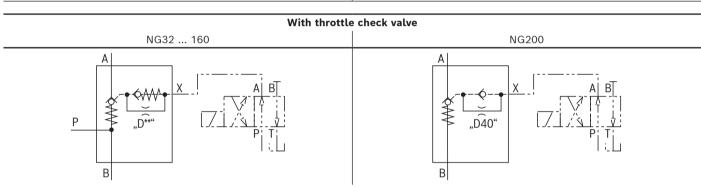

Throttle check valve installed at the factory; no additional external nozzle required (for nozzle diameter, see below)

Type ZSFW

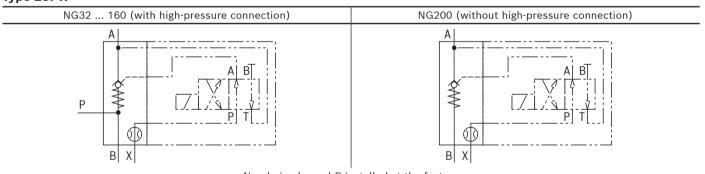

Nozzle in channel P installed at the factory

Nozzle fitting

Nozzle Ø in mm

	Size												
	32	40	50	63	80	100	125	160	200				
Type ZSF 1)	0.8	0.8	0.8	0.8	1.0	1.0	1.2	1.5	4.0				
Type ZSFW 2)	0.8	0.8	0.8	0.8	1.0	1.0	1.2	1.5	4.0				

- 1) The data applies for the internal or external nozzle fitting
- $^{2)}$ Nozzle in channel P installed at the factory (M8 x 1)


Function, section: Type ZSF

The valve type ZSF is a pilot operated check valve in sandwich plate design. It is used for the leakage-free isolation of pressurized working circuits (e.g. pressing cylinder). Due to its favorable flow characteristic values and the low cracking pressure of the main poppet (3), it is particularly suitable for the pulling function and for filling e.g. the main cylinders at presses. The integrated pressure port P (not for NG200) reduces the piping necessary for the high pressure build-up.

The valve basically comprises of a housing (1), control spool (2), main poppet (3) and the compression springs (5) and (6).


The valve allows for free flow from A to B. In the opposite direction, the main poppet (3) is held on the seat by the compression spring (5) and the pressure available at port B. The pressure at the control port X pushes the control spool (2) downwards, against the compression spring (6), and pushes the main poppet (3) off the seat. Now, the valve can also be flown through in the opposite direction.

For NG200, the measuring point (8) allows for the recording of pressure developments.

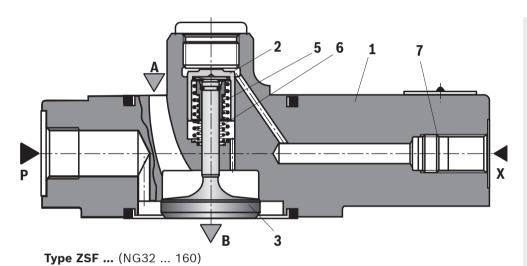

Motice:

In order to limit the dynamic load using the control spool (2) when controlling the main poppet (3), an upstream damping nozzle (internal or external) is to be provided. Versions with a throttle check valve (7) installed at the factory should be selected preferably (see page 3). In case of non-compliance, increased dynamic loads may occur having detrimental effects on the operating time.

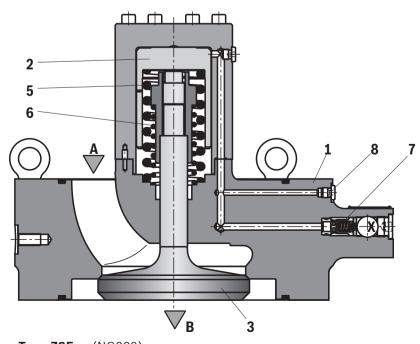


Type ZSF ... (NG200)

Function, section: Type ZSFW

The function of valve type ZSFW basically corresponds to that of type ZSF, however with attachable directional valve (separate order).

Here, the control spool (2) is controlled via port X and unloaded internally, via channel A.

The "Open" working direction of the control spool (2) is damped by a nozzle (4) integrated at the factory (see page 3).

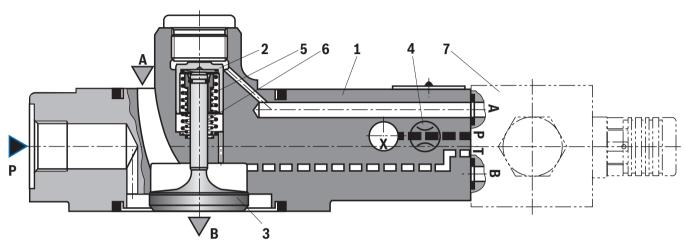


Type ZSFW... (NG32 ... 160)

(without pre-decompression and built-on directional valve, vertical working direction of the control spool)

Notice:

The nozzle (4) has been installed in channel P of the directional valve port at the factory.

In case of changes in the nozzle fitting, there may be increased dynamic loads which may have detrimental effects on the operating time.

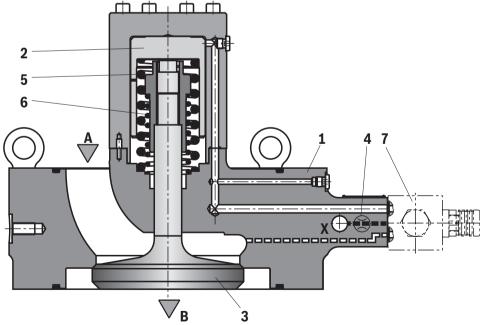

Type ZSFW... (NG200)

(without pre-decompression and built-on directional valve, vertical working direction of the control spool)

7 Directional valve type 4WE 6 D (separate order)

Technical data

(For applications outside these parameters, please consult us!)

General										
Size		32	40	50	63	80	100	125	160	200
Weight	kg	3.5	4.2	5.5	7	10	15	26	47	150
Installation position (working direction of the control spool)		any		·	•			•	,	
Ambient temperature range	°C	-30	+80 1)							
Porting pattern for directional valve set-up "W"		ISO 44	101-03-0	02-0-05						

Hydraulic							
Maximum operating pressure	▶ Port B, P	bar	350 ¹⁾				
	▶ Port X	bar	150				
	▶ Port A	bar	16				
Cracking pressure 2)		bar	≈ 0.12				
Flow (Δp = 0.3 bar)		l/min	depending on the case of application, see page 16				
Hydraulic fluid			see table below				
Hydraulic fluid temperature range	9	°C	-30 +70				
Viscosity range		mm²/s	10 800				
Maximum admissible degree of c fluid, cleanliness class according	•		class 20/18/15 ³⁾				
Technical data	► Directional spool valve		see data sheet 23178				
of the directional valve	► Directional seat valve		see data sheet 22058				

Hydraulic fluid		Classification	Suitable sealing materials	Standards	Data sheet	
Mineral oils		HL, HLP, HLPD, HVLP, HVLPD	NBR, FKM	DIN 51524	90220	
Bio-degradable	► Insoluble in water	HETG	FKM	ICO 15200		
		HEES	FKM	ISO 15380	90221	
	► Soluble in water	HEPG	FKM	ISO 15380		
Flame-resistant	▶ Water-free	HFDU (glycol base)	FKM			
		HFDU (ester base)	FKM	ISO 12922	90222	
		HFDR	FKM			
	► Containing water	HFC (Fuchs: Hydrotherm 46M, Renosafe 500; Petrofer: Ultra Safe 620; Houghton: Safe 620; Union: Carbide HP5046)	NBR	ISO 12922	90223	

Important information on hydraulic fluids:

- ► For further information and data on the use of other hydraulic fluids, please refer to the data sheets above or contact us.
- ► There may be limitations regarding the technical valve data (temperature, pressure range, life cycle, maintenance intervals, etc.).
- ► The ignition temperature of the hydraulic fluid used must be 50 K higher than the maximum surface temperature.
- ▶ Bio-degradable and flame-resistant containing water:

 If components with galvanic zinc coating (e.g. version "J3" or "J5") or parts containing zinc are used, small amounts of dissolved zinc may get into the hydraulic system and cause accelerated aging of the hydraulic fluid. Zinc soap may form as a chemical reaction product, which may clog filters, nozzles and solenoid valves particularly in connection with local heat input.

► Flame-resistant – containing water:


Due to the increased cavitation tendency with HFC hydraulic fluids, the life cycle of the component may be reduced by up to 30% as compared to the use with mineral oil HLP. In order to reduce the cavitation effect, it is recommended – if possible specific to the installation – backing up the return flow pressure in ports T to approx. 20% of the pressure differential at the component.


- Observe the technical data of the directional valve, see data sheet 23178 (type 4WE 6 D...) or 22058 (type M-.SEW 6...)
- ²⁾ Pressure differential at the main poppet for overcoming the spring force.
- 3) The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and simultaneously increases the life cycle of the components. Available filters can be found at www.boschrexroth.com/filter.

Characteristic curves

(measured with HLP46, θ_{oil} = 40 ±5 °C)

Pressure differential Δp between ports A and B against the flow q_V (A \rightarrow B).

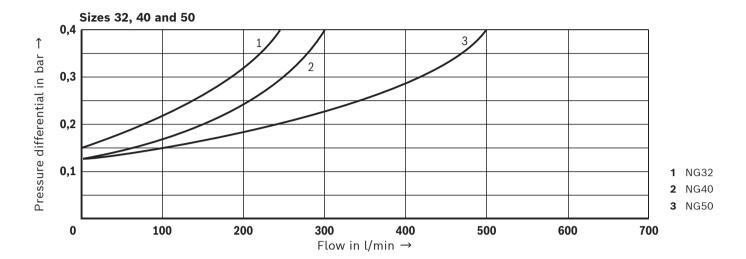


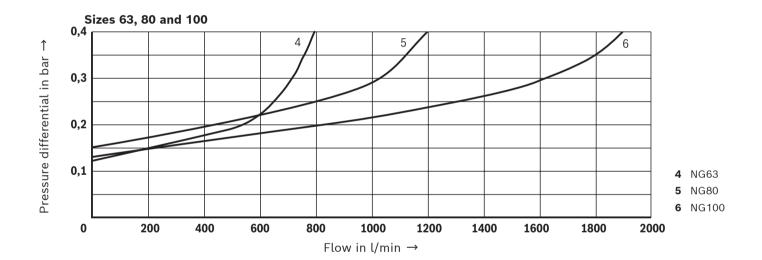


Characteristic curves

(measured with HLP46, ϑ_{oil} = 40 ±5 °C)


Pressure differential Δp between ports A and B against the flow q_V (A \rightarrow B).

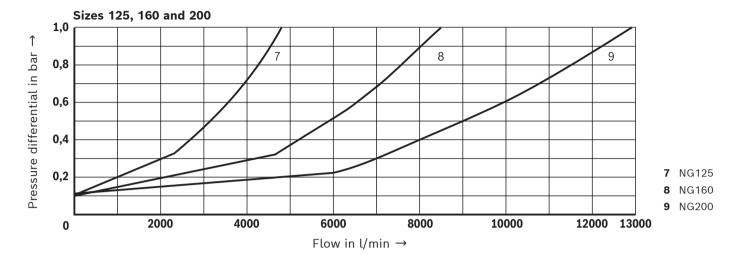

Pressure differential Δp between ports A and B against the flow q_V (B \rightarrow A).

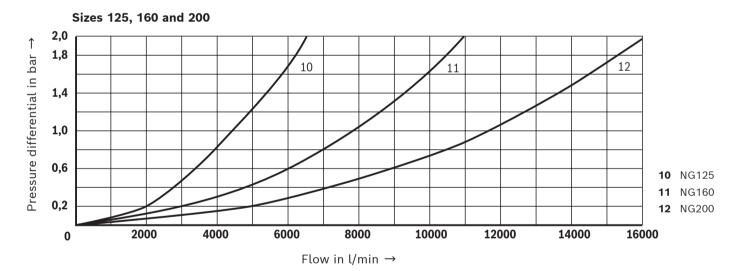

Dimensions: Type ZSF – NG32 ... 160 (dimensions in mm)

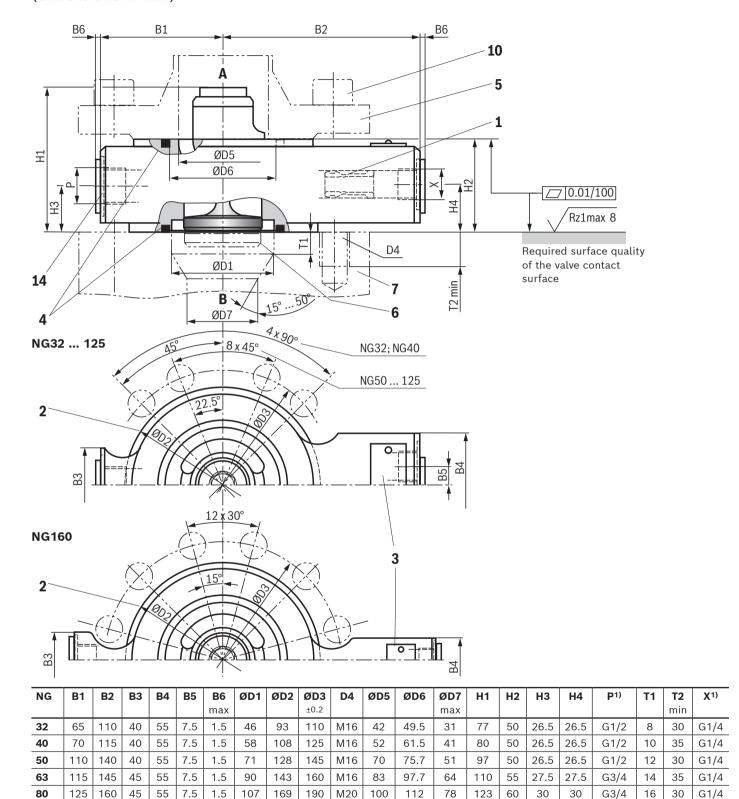

70 | 60

7.5

1.5

1.5

1.5

M27

M30

M33

138.5

32.5

37.5

48.5

69.5

G1


G1


G1 1/4

G3/8


G3/8

G1/2

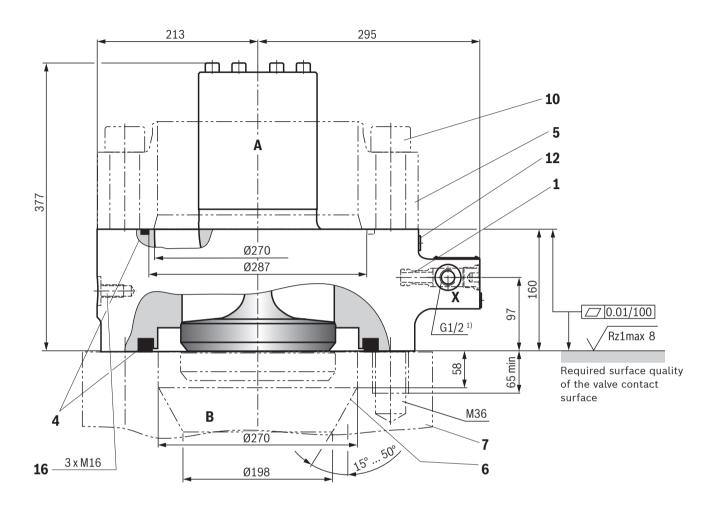

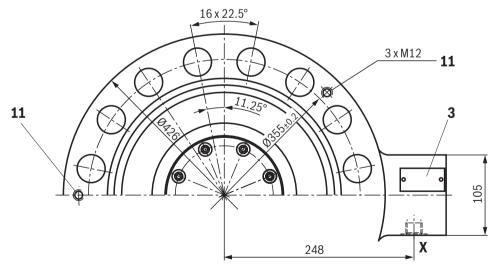


Dimensions: Type ZSFW – NG32 ... 125 (dimensions in mm)

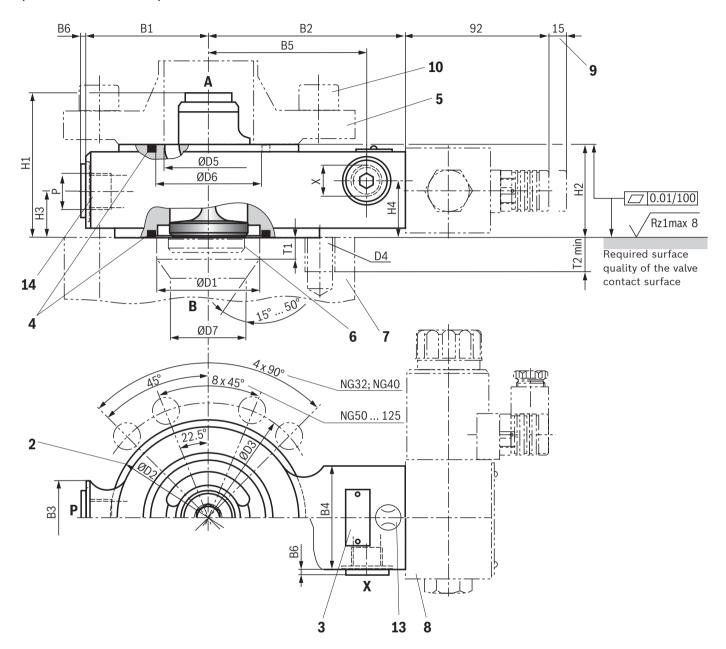

NG	B1	B2	В3	B4	B5	В6	ØD1	ØD2	ØD3	D4	ØD5	ØD6	ØD7	H1	H2	Н3	Н4	P1)	T1	T2	X1)
						max			±0.2				max							min	
32	65	107	40	55	85	1.5	46	93	110	M16	42	49.5	31	77	50	26.5	34	G1/2	8	30	G1/4
40	70	112	40	55	90	1.5	58	108	125	M16	52	61.5	41	80	50	26.5	34	G1/2	10	35	G1/4
50	110	137	40	55	115	1.5	71	128	145	M16	70	75.7	51	97	50	26.5	34	G1/2	12	30	G1/4
63	115	142	45	55	120	1.5	90	143	160	M16	83	97.7	64	110	55	27.5	34.5	G3/4	14	35	G1/4
80	125	157	45	55	135	1.5	107	169	190	M20	100	112	78	123	60	30	37.5	G3/4	16	30	G1/4
100	140	186	55	55	165	1.5	132	212	240	M27	124	138.5	96	145	65	32.5	40	G1	25	55	G3/8
125	180	206	65	60	184	1.5	170	248	280	M30	148	176	124	215	75	37.5	50	G1	33	50	G3/8

Dimensions: Type ZSFW - NG160


(dimensions in mm)

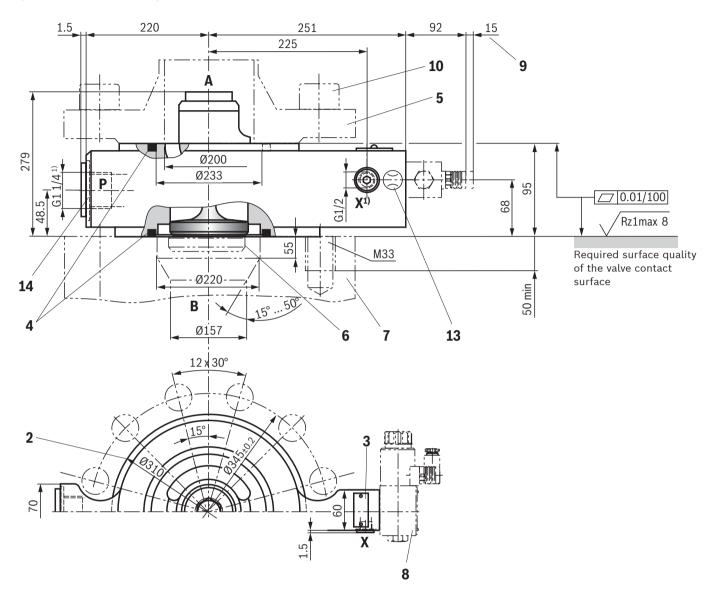

Item explanation see page 14

1) Version "01"; data for version "12", see page 15

Dimensions: Type ZSFW – NG200 (dimensions in mm)

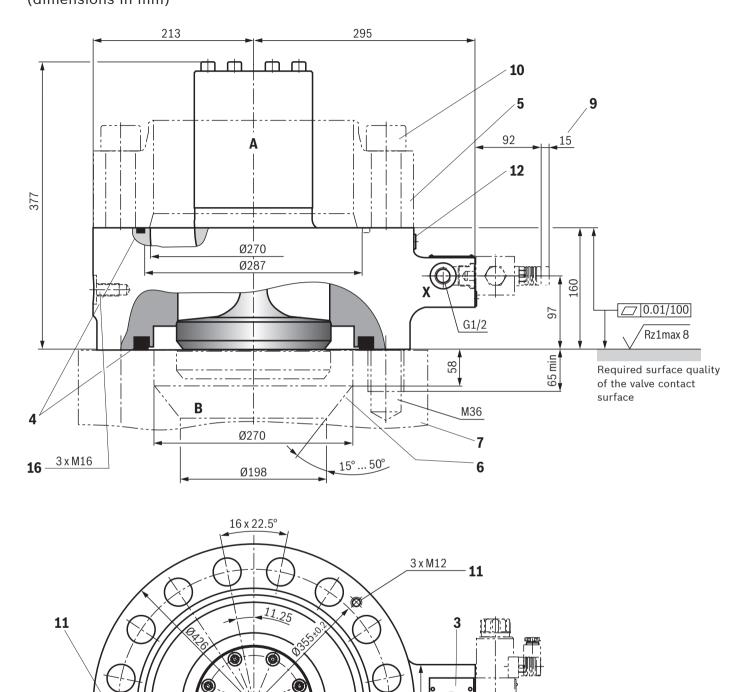

X

13

8

248

Item explanation see page 14


Dimensions

- 1 Throttle check valve
- 2 Centering diameter
- 3 Name plate
- 4 Seal rings
- 5 Counterflange (separate order; dimensional proposal see below)
- 6 Stroke of the main poppet (see page 15)
- 7 Notice: Valve contact face (e.g. pressing cylinders, bearing structures, etc.) must be sufficiently rigid.
 The prefill valve must not be loaded by bending.
- **8** Directional valve (separate order) see data sheet 23178 (type 4WE 6 D...) or 22058 (type M-.SEW 6...)

- 9 Space required for removing the mating connector
- 10 Valve mounting screws (separate order, see page 17)
- **11** Threads for transport device (ring bolts), evenly distributed to circumference (3x M12)
- **12** Measuring point G 1/4, tightening torque M_A = 30 Nm ±10%
- 13 Damping nozzle M8 x 1
- **14** Additional pressure port; if not used, seal in a hydraulically tight way by means of suitable plug screws
- 15 Form of the welding gap according to DIN EN ISO 9692-1-1.3
- **16** Threads for transport device (ring bolts), evenly distributed to circumference (3x M16)

Dimensional proposal for counterflange (pos. 5)

(dimensions in mm)

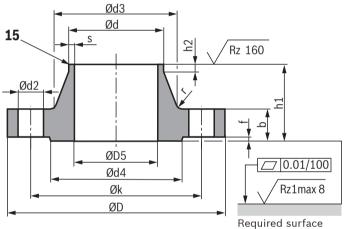

Required surface
quality of the valve
contact surface

Maximum operating p	ressure p _{max}	350 bar
Recommended	► NG32 160	C22
flange material	▶ NG200	S355J2G3

Notices:

- ▶ When using other counterflanges than the ones specified here, it may be necessary to reduce the operating pressure. (Rigid) counterflanges designed for the max. admissible operating pressure are available as accessories, see page 17.
- ▶ It is recommended to attach the valve body to the three threaded eyelets of the same size at the circumference of the housing (pos. 11 or 16) for the safe handling during transport as well as installation and removal.

NG				Fla	nge			Аррі		Raised face			
	Ød1	Ød2	ØD	ØD5+2	b	Øk	h1	Ød3	s	r	h2	Ød4	f
32	48.3	18	150	42	22	110	49	64	3.2	6	7	88	3
40	60.3	18	165	52	29	125	57	75	3.6	6	8	102	3
50	76.1	18	185	70	34	145	64	90	3.6	6	10	122	3
63	88.9	18	200	83	43	160	77	105	3.6	8	12	138	3
80	114.3	22	235	100	51	190	95	134	3.6	8	12	162	3
100	139.7	30	295	124	62	240	116	168	4.0	8	12	188	3
125	168.3	33	345	148	79	280	138	202	4.5	10	12	218	3
160	219.1	36	415	200	118	345	186	256	5.9	10	16	285	3
200	273	39	420	270	100	355	140	292	6.5	6	16	_	-


Valve mounting screws and ordering code for counterflange see page 17.

Thread sizes of the connection versions "01" (preferred type) and "12" (special version) and throttle check valve

NG	"0	1"	1	'12"	Throttle check valve		
	P	x	P	x			
32	G1/2	G1/4	3/4 - 16 UNF	3/4 - 16 UNF	G1/4		
40	G1/2	G1/4	3/4 - 16 UNF	3/4 - 16 UNF	G1/4		
50	G1/2	G1/4	3/4 - 16 UNF	3/4 - 16 UNF	G1/4		
63	G3/4	G1/4	1 1/16 - 12 UNF	3/4 - 16 UNF	G1/4		
80	G3/4	G1/4	1 1/16 - 12 UNF	3/4 - 16 UNF	G1/4		
100	G1	G3/8	15/16 - 12 UN	7/8 - 14 UNF	G3/8		
125	G1	G3/8	_	_	G3/8		
160	G1 1/4	G1/2	15/8 - 12 UN	1 1/16 - 12 UN	G1/2		
200	-	G1/2	_	-	Installation bore 1)		

¹⁾ similar to "M-SR 15 KE00 ..."

Poppet geometry and determination of the minimum pilot pressure

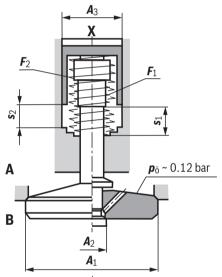

without pre-decompression | with pre-decompression 2)

A1 = Effective area of the main poppet

A2 = Effective area of the pilot poppet

A3 = Effective area of the control spool

s1 = Stroke of the main poppet

s2 = Stroke of the control spool

F1 = Spring force of the valve spring

F2 = Spring force of the compression spring of the control spool

 V_{st} = Pilot volume for opening the valve

 o_C = Cracking pressure (pressure differential at the main poppet for overcoming the spring force F1)

 p_{St} = Pilot pressure at port X

 p_B = System pressure at port B

NG	A 1	A 2 ²⁾	A 3	s 1	s 2	F 1	F 2	V _{st}	Uncheck	ratio
	in cm ²	in cm ²	in cm ²	in mm	in mm	in N	in N	in cm ³	1) in bar	²⁾ in bar
32	8.04	0.50	2.01	8.5	6.5	9 22	58 109	1.3	4.0	0.3
40	13.52	0.79	3.14	10.0	7.0	14 29	93 162	2.2	4.3	0.3
50	21.24	1.13	4.71	12.5	9.0	23 49	149 261	4.2	4.5	0.3
63	32.67	1.77	7.07	14.5	11.0	35 63	206 348	7.8	4.6	0.3
80	49.02	2.54	10.18	17.0	13.0	57 127	310 579	13.2	4.8	0.3
100	73.13	3.80	15.90	22.0	15.0	81 193	476 952	25.5	4.6	0.2
125	120.76	5.72	28.27	30.0	22.5	135 319	878 1667	59.4	4.3	0.2
160	196.07	9.08	45.36	40.0	27.0	241 516	1335 2395	122.0	4.3	0.2
200	314.16	-	78.54	48.0	34.0	425 850	2389 3822	267.0	4.0	_

¹⁾ Without pre-decompression

Unchecking ratio = $\frac{\text{Pilot pressure } \boldsymbol{p}_{\text{St}}}{\text{System pressure } \boldsymbol{p}_{\text{B}}}$

Example: Type "ZSF 32...F0";

p_B = 30 bar

 $p_{St} = 4.0 \times 30 \text{ bar} = 120 \text{ bar}$


²⁾ With pre-decompression (on request)

Flow q_V in l/min (A to B) for different cases of applications ($\Delta p \approx 0.3$ bar)


NG	32	40	50	63	80	100	125	160	200
Case of application 1	200	300	500	800	1200	1900	3000	4200	7000
Case of application 2	170	250	400	650	1000	1600	2600	3900	6510
Case of application 3	140	220	360	560	900	1400	2200	3400	5670
Case of application 4	100	150	240	380	620	950	1500	2300	3850
Case of application 5	70	110	170	280	450	700	1100	1690	2800

Cases of application


Case of application 1



Case of application 2




Case of application 3




Size of the filling tank at least 1.5 x cylinder content


Case of application 4



Case of application 5



Information on case of application 2 to 5



For limit areas, please contact us.
It is often enough, to select a pipeline which
is one size larger.

- 1 Cylinder
- 2 Prefill valve
- **3** Baffle plate (prevents the formation of tunnels after pulling and improves the flow path when flowing back into the container)
- 4 Observe the supply cross-section
- a min. 300 mm with extended cylinder
- b max. 1000 mmc min. 500 mmh max. 500 mm

Motices:

- Wrong dimensioning of the prefill valve and suction line may cause cavitation effects at the cylinder and consequential damage.
- ▶ The flow values specified show benchmarks at different suction ratios. The flow values for various cases of application of a special size result from the present conditions on the low-pressure side (e.g. length of the pipeline, number of pipe bends, pipe cross-sections, geostatic height of the hydraulic fluid level) and are therefore no direct property of the prefill valve. The main focus lies on observing the maximum admissible underpressure in the inlet area of the cylinder (e.g. especially during acceleration and maximum velocity). The initial situation in the cylinder during the beginning of the movement can be improved by actively controlling the control open spool before the movement (temporary control).

Valve mounting screws, counterflange (separate order)

		Hexagon socke	- 10.9-flZn)	Counterflange	
NG	Quantity	Dimension	Tightening torque M _A in Nm	Material no.	Material no.
32	4	M16 x 100	240	R913015640	R900842693
40	4	M16 x 110	240	R913015642	R900825610
50	8	M16 x 110	240	R913015642	R900826441
63	8	M16 x 130	240	R913014713	R900849622
80	8	M20 x 140	460	R913015675	R900862915
100	8	M27 x 180	1150	R913059494	R900834583
125	8	M30 x 200	1600	R913015753	R900861508
160	12	M33 x 260	2200	R913050969	R900846478
200	16	M36 x 320	2600	R913050473	R901205467

Notices:

- ► The specified tightening torques stated are guidelines when using screws with the specified friction coefficients and when using a manual torque wrench (tolerance ±10%).
- ▶ The specified tightening torques were calculated with the total friction coefficient μ = 0.09 ... 0.14; adapt to modified surfaces.

Throttle check valve (screw-in version for retrofitting with version "D00")

NG	Frame size	Orifice bore in mm	Throttle check valve (retrofit kit) material number
32	1	0.8	R961012350
40	1	0.8	R961012350
50	1	0.8	R961012350
63	1	0.8	R961012350
80	1	1.0	R961012351
100	2	1.0	R961013571
125	2	1.2	R961013572
160	3	1.5	R961013573

Additional functions with special numbers (upon request)

Symbol	Version SO number Size		Size	Description/special characteristic		
A X1 X2 X B X2	ZSF	SO1	32, 40, 50, 63, 80, 100, 125	 ▶ Channels for forwarding (X2) and high pressure (X1) ▶ Flange height opposite the standard housing reduced; additional locating pin bore on the installation surface required for correct alignment 		
A	ZSF	SO6	32, 40, 50, 63, 80, 125, 160	➤ Spring chamber port, external ➤ Port P not applicable		
<u>Y</u> <u>X</u> B	ZSFW		125			
-	ZSF	SO12	160	Shortened stroke of the control open spool (shorter actuating time)		

Further information

•	Hydraulic valves for industrial applications	Operating instructions 07600-B
•	Hydraulic fluids on mineral oil basis	Data sheet 90220
•	Environmentally compatible hydraulic fluids	Data sheet 90221
•	Flame-resistant, water-free hydraulic fluids	Data sheet 90222
•	Flame-resistant hydraulic fluids - containing water (HFAE, HFAS, HFB, HFC)	Data sheet 90223
•	Reliability characteristics according to EN ISO 13849	Data sheet 08012
•	Hexagon socket head cap screw, metric/UNC	Data sheet 08936
•	Mating connectors and cable sets for valves and sensors	Data sheet 08006
•	Selection of filters	www.boschrexroth.com/filter
•	Information on available spare parts	www.hoschrexroth.com/snc