

▼ Gauge shown: **T6003L**



- **Dual scale reading calibrated in bar and psi**
- **All gauges have spring-loaded backs with rubber blow-out plugs to protect case assembly in case of over-pressurization**
- **Integral maximum indicator pointer standard included**
- **2800 and 3500 bar models include flange mounting**
- **1/2" NPTF versions are made of high strength alloy steel**
- **0.25" cone models are made of 316 stainless steel, with 403 stainless steel on 2800 and 3500 bar models.**

▼ An Enerpac P2282 hand pump equipped with a T6011L test system gauge is used for proof pressure testing of hydraulic valves.



T Series

Pressure Range:

0 - 3500 bar

Face Diameter:

162 - 192 mm

Accuracy, % of full scale:

± 0,5 - 1,5%



Cone Mount Gauge Adaptor

Contains fittings to connect 1/4" cone fitting gauge to 3/8" cone system. Kit includes 43-301 tee, 43-704 gauge adaptor and 45-116 tubing. Order model number: **83-011**.

Page: **85**




Cone Mount Gauge Connector

For connecting gauges with 0.25" cone fitting directly to model number **11-100** or **11-400** pump (page 84). May be used with other

0.25" cone systems

Order model number: **43-704**

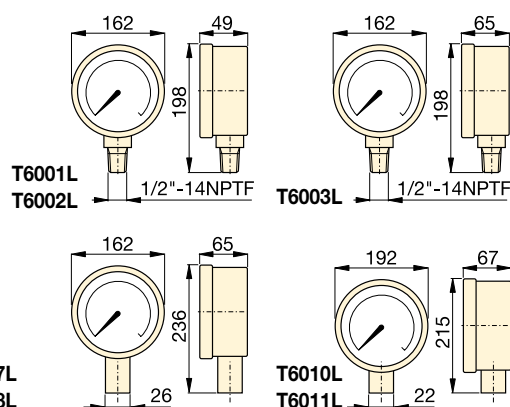

Pressure Range	Pressure Range	Model Number		Number Intervals	Graduation Intervals	Number Intervals	Graduation Intervals
		Alloy Steel 1/2" NPTF	Stainless Steel 0,25 cone				
(bar)	(psi)			(bar)	(bar)	(psi)	(psi)
0-70 ¹⁾	0-1000	T6001L	—	10	1	100	10
0-350 ¹⁾	0-5000	T6002L	—	50	5	500	50
0-700 ¹⁾	0-10.000	T6003L	T6007L	100	10	1.000	100
0-1400 ¹⁾	0-20.000	—	T6008L	200	20	1.000	100
0-2800 ²⁾	0-40.000	—	T6010L	500	20	5.000	200
0-3500 ²⁾	0-50.000	—	T6011L	500	50	5.000	200

¹⁾ Accuracy ± 0,5%

²⁾ Accuracy ± 1,5%