

DRILL-PRESS TOGGLE CLAMPS


DRILL-PRESS ADAPTOR: 6061 ALUMINUM

OTHER COMPONENTS: SEE CATALOG PAGE FOR EACH SPECIFIC ITEM





These hold-down Toggle Clamps are ideal for clamping on drill presses, with an adaptor base for slotted tables and a quick adjusting spindle. Choose either a compact, easy-opening vertical T handle, or a low-profile horizontal handle. Open arm provides adjustable spindle location. Supplied with two quick-adjusting Flat-Cushion Spindles, one short and one long. Choose T Nut size to fit table slots from 3/8 to 5/8" (10 to 16mm in metric).

**Vertical
T Handle**

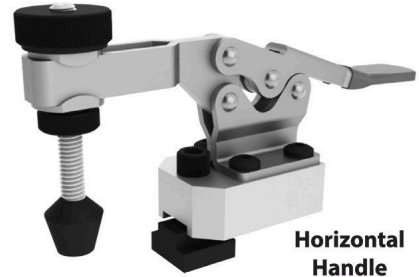

**Horizontal
Handle**

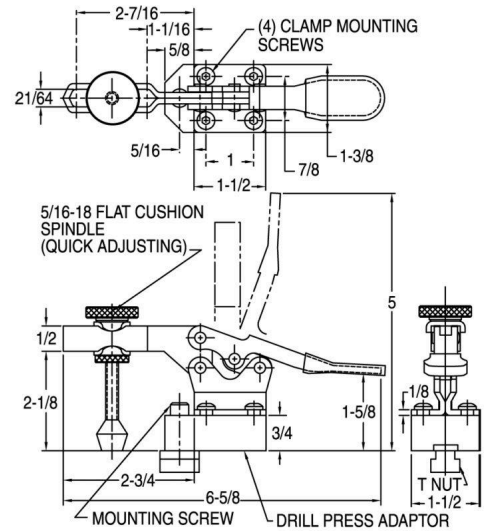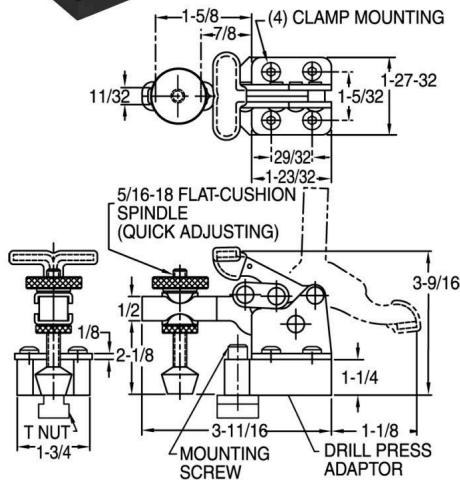

VERTICAL T HANDLE (INCH)

PART NO.	MOUNTING SCREW SIZE	TABLE-SLOT SIZE	T NUT	DRILL-PRESS ADAPTOR	MOUNTING SCREW	CLAMP MOUNTING SCREW(4)	QUICK-ADJUSTING SPINDLE	HOLDING CAPACITY (LBS)			
CL-300-VTCD-5	5/16-18	TAPPED	NONE	CL-300-VTCA-6	CL-5/16-18x1.75-SHCS	CL-1/4-20x.50-BHCS	CL-516212-FCQA	350			
CL-300-VTCD-5-19		3/8 or 10mm	CL-19-TN		CL-5/16-18x1.50-SHCS						
CL-300-VTCD-5-20		7/16	CL-20-TN								
CL-300-VTCD-5-21		1/2	CL-21-TN		CL-3/8-16x1.75-SHCS						
CL-300-VTCD-6	3/8-16	TAPPED	NONE		CL-3/8-16x1.50-SHCS						
CL-300-VTCD-6-00		7/16	CL-00-TN								
CL-300-VTCD-6-12		12mm	CL-12-TN								
CL-300-VTCD-6-0		1/2	CL-0-TN								
CL-300-VTCD-6-1		9/16 or 14mm	CL-1-TN								
CL-300-VTCD-6-16		5/8 or 16mm	CL-16-TN								

HORIZONTAL HANDLE (INCH)

CL-450-HTCD-5	5/16-18	TAPPED 5/16-18	NONE	CL-450-HTCA-6	CL-5/16-18x1.25-SHCS	CL-1/4-20x.50-BHCS	CL-516212-FCQA	-
CL-450-HTCD-5-19		3/8 or 10mm	CL-19-TN		CL-5/16-18x1.00-SHCS			
CL-450-HTCD-5-20		7/16	CL-20-TN					
CL-450-HTCD-5-21		1/2	CL-21-TN					
CL-450-HTCD-6	3/8-16	TAPPED 3/8-16	NONE		CL-3/8-16x1.25-SHCS			
CL-450-HTCD-6-00		7/16	CL-00-TN		CL-3/8-16x1.00-SHCS			
CL-450-HTCD-6-12		12mm	CL-12-TN					
CL-450-HTCD-6-0		1/2	CL-0-TN					
CL-450-HTCD-6-1		9/16 or 14mm	CL-1-TN					
CL-450-HTCD-6-16		5/8 or 16mm	CL-16-TN					