

HYDAC INTERNATIONAL

Filter Clogging Indicators



1. TECHNICAL SPECIFICATIONS

1.1 GENERAL

HYDAC clogging indicators are designed to indicate visually and/or electrically when the filter elements must be cleaned or changed. The operational safety of a system and efficient utilisation of a filter element can only be guaranteed if clogging indicators are used.

Depending on the type of filter, vacuum, return line or differential pressure clogging indicators are used.

1.2 SEALS

NBR (= Perbunan) or V (= Viton)

1.3 INSTALLATION

Some users install filters without clogging indicators and prefer instead to replace or clean the elements according to a specified time schedule or according to a set number of operating hours. However, this involves some risk.


Fitting a clogging indicator has two main advantages:

- The operator no longer has to estimate when the element is clogged.
- The unnecessary costs of changing the element too early are avoided. All standard filters can be fitted with a clogging indicator at any time, by simply screwing it in.

1.4 DESIGN

Return line indicators

These are used for return line and suction filters. In return line filters they react to the increasing static pressure before the filter element, and in suction filters to the decreasing pressure after the filter element, which is caused by increasing contamination.

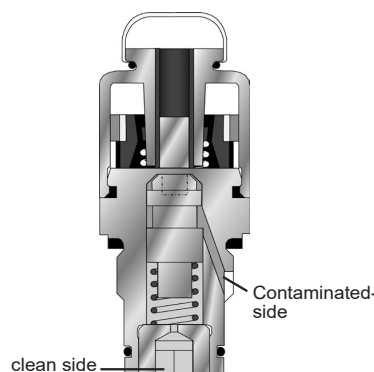


Differential pressure indicators

These are used for all inline filters and react to the increasing pressure differential caused by increasing contamination of the filter element.

The simplest installation of the differential clogging indicator is via G 1/2" cavity (according to HYDAC works standard HN 28-22)

The differential pressure indicator type V02 is piped up separately.



1.5 SPECIAL INDICATORS

Mobile indicators

These indicators have been developed for special applications and are fitted with AMP Junior Power Timer, AMP Superseal or Deutsch plugs.

ATEX indicators

These indicators are used in potentially explosive locations and are subject to the ATEX Equipment Directive 2014/34/EU and the ATEX Operator Directive 1999/92/EG.



UL and CSA indicators

Indicators which are exported to the USA and Canada often require classification according to current UL and CSA standards. The UL and CSA symbols are found on many products, particularly in the field of electrical engineering.



1.6 TABLE OF CONTENTS

Contents	Page:
Quick selection table:	
by indicator type	2
Quick selection table:	
by filter type	3
Standard indicators	
Vacuum	4
Return line	7
Differential pressure	21
Indicator (VL...GW.x) for Condition Monitoring 24	
Mobile indicators	
Return line	29
Differential pressure	31
ATEX indicators	
Return line	34
Differential pressure	36
UL/CSA indicators	
Differential pressure	38
Return line	39
Model code - Standard	40
Adapters	42
DESINA Specification	44

2. QUICK SELECTION TABLES FOR CLOGGING INDICATORS

2.1 BY INDICATOR TYPE

Please select the type of indicator you require from the table.

Type		Vacuum indicator	Permitt. operating pressure [bar]	Return line indicator	Permitt. operating pressure [bar]	Differential pressure indicator	Permitt. operating pressure [bar]
Visual	B			●	7	●	210/420
	BF					●	40
	BM			●	7	●	210/420
	E			●	7 (11)		
	ES			●	7		
	K	●	*	●	*		
	R			●	7		
	UBM	●	0				
	UE	●	0				
	UED	●	0				
	V					●	100
Electrical	C			●	40	●	210/420
	D			●	40	●	210/420
	F			●	40		
	LE			●	7	●	420
	LZ			●	7	●	420
	UF	●	0				
	VE					●	100
	VZ					●	100
Electronic	GC			●	7	●	420
	GW					●	25
Mobile	CD					●	210
	CJ					●	210/420
	CM			●	40	●	210
	CS					●	210/420
	FD			●	40		
	FJ			●	40		
	FS			●	40		
	LEM			●	7	●	420
	M					●	210
ATEX	B			●	7	●	210/420
	C			●	40	●	210/420
UL Approval (=CRUUS)	C					●	210/420
CSA Approval	C			●	40		

* Dependent on application.

2.2 BY FILTER TYPE

Please select the clogging indicator required for your filter from the table.

Type	BF	BL	BLT	DF DFF	DFDK DFDKN	DF MA/QE MP DFFX	DFM	DFN	DFP	DFZ	ELF	DFNF	DFPF	FLN	FLND FMND	HDF HDF	HDP	HFM	LF LFF	LFM	LFN	LFNF
B				●	●	●	●	●						●	●			●	●	●	●	
BF																						
BM				●	●	●	●	●	●	●				●	●	●		●	●	●	●	
E																						
ES																						
K	●	●	●										●									
R/RS																						
UBM	●	●	●										●									
UE														● ¹⁾					● ¹⁾			
UED																	●					
V																						
C				●	●	●	●	●	●	●	●	●		●	●	●		●	●	●	●	
D				●	●	●	●							●	●	●			●	●	●	
F																						
LE				●	●	●	●	●	●	●	●	●		●	●			●	●	●	●	
LZ				●	●	●	●	●	●	●	●	●		●	●	●		●	●	●	●	
UF														● ¹⁾					● ¹⁾			
VE																						
VZ																						
GC				●	●	●	●	●	●	●	●	●		●	●	●		●	●	●	●	
GW																						
CD				●	●	●	●	●	●	●	●	●		●	●	●		●	●	●	●	
CJ/CS				●	●	●	●	●	●	●	●	●		●	●	●		●	●	●	●	
CM				●	●	●	●	●	●	●	●	●		●	●	●			●	●	●	
FJ/FD/ FS																						
M														●	●				●	●	●	
LEM				●	●	●	●	●	●	●	●	●		●	●	●		●	●	●	●	

Type	LPF	MDF	MF	MFD	MFM	MFX	NF	NFD	RF	RFD	RFL	RFLD	RFN	RFND	RFM	RKM	SF	SFF	SFM
B	•	•			•				•	•	•	•	•	•	•	•			
BF	•					•													
BM	•	•			•	•	•	•	•	•	•	•	•	•	•	•			
E			• ²⁾	• ²⁾															
ES									•	•			•	•	•				
K																			
R/RS																•			
UBM																			
UE	• ¹⁾		• ¹⁾	• ¹⁾							• ¹⁾					•	•	•	•
V											•	•							
C	•	•			•	•	•	•	•	•	•	•	•	•	•	•			
D	•	•			•	•	•				•					•			
F			•	•															
LE	•	•			•	•	•	•	•	•	•	•	•	•	•	•			
LZ	•	•														•			
UF	• ¹⁾		• ¹⁾	• ¹⁾							• ¹⁾					•	•	•	•
VE											•	•							
VZ											•	•							
GC	•	•			•	•	•	•	•			•	•	•	•	•			
GW	•						•	•			•	•							
CD	•	•			•		•	•	•	•	•	•	•	•	•	•			
CJ/CS	•	•			•		•	•	•	•	•	•	•	•	•	•			
CM	•	•				•	•	•	•	•	•	•	•	•	•	•			
FJ/FD/ FS			•	•					•	•			•	•	•	•			
M	•					•													
LEM	•	•			•	•	•	•	•	•	•	•	•	•	•	•			

¹⁾ Can only be used for suction operation



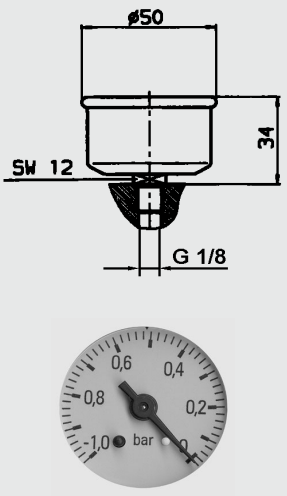
²⁾ Use VMF 16 E.0 only

E 7.050.15/11.16



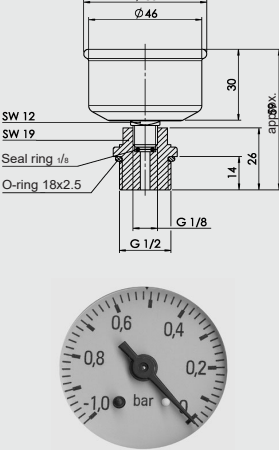
3. SPECIFICATIONS

3.1 VACUUM INDICATORS



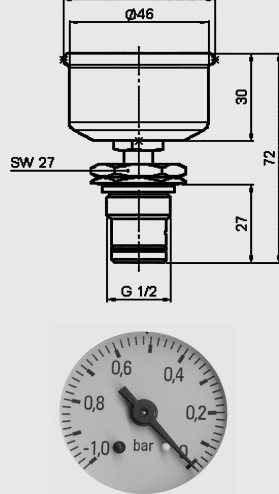
VMF x UE.x

 	Type of indication	visual-analogue, scale indication	
	Weight	53 g	
	Pressure setting or indication range	-1 bar to 0 bar	
	Permitt. operating pressure	-0.7 to 0 bar continuous	
	Permitt. temperature range	-20 °C to +60 °C	
	Thread	G 1/8	
	Max. torque	10 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VMF 1 UE.0	

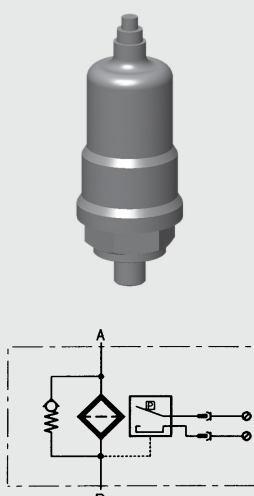
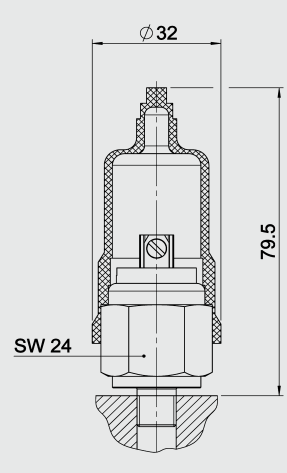
VR x UE.x

 	Type of indication	visual-analogue, scale indication	
	Weight	125 g	
	Pressure setting or indication range	-1 bar to 0 bar	
	Permitt. operating pressure	-0.7 to 0 bar continuous	
	Permitt. temperature range	-20 °C to +60 °C	
	Thread	G 1/2	
	Max. torque	30 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VR 1 UE.0	

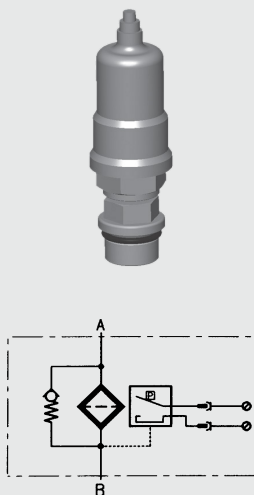
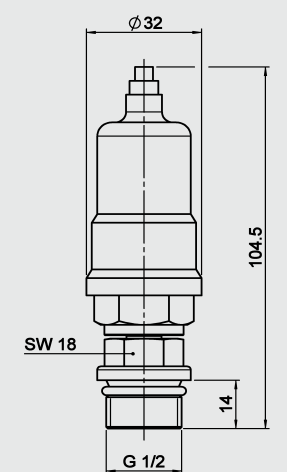
VRD x UE.x

 	Type of indication	visual-analogue, scale indication	
	Weight	133 g	
	Pressure setting or indication range	-1 bar to 0 bar	
	Permitt. operating pressure	-0.7 to 0 bar continuous	
	Permitt. temperature range	-20 °C to +60 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VRD 1 UE.0	

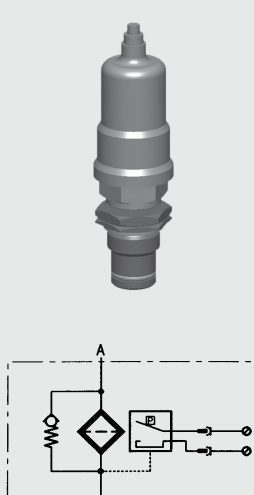
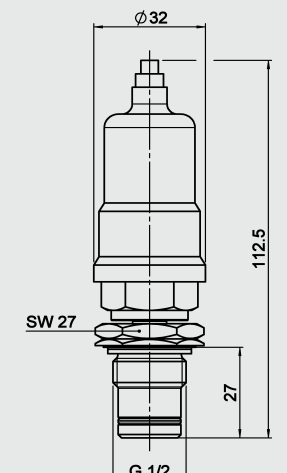
VMF x UF.x

	Type of indication	electrical switch
	Weight	75 g
	Pressure setting or indication range	-0.2 bar \pm 0.1 bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	N/O contact (N/C as an option)
	Max. switching voltage	48 V
	Electrical connection	threaded connection
	Max. switching voltage at resistive load	60 W = 100 VA ~
	switching capacity	ohmic 2.5 A at 24 V = ohmic 2.5 A at 42 V ~
	Protection class to DIN 40050	IP 65, terminals IP 00
	Order example	VMF 0.2 UF.1
		


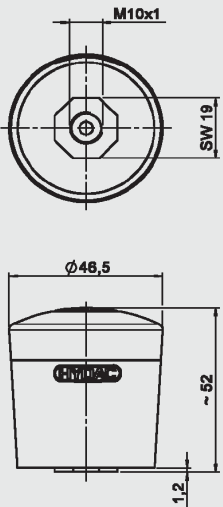
VR x UF.x

	Type of indication	electrical switch
	Weight	146 g
	Pressure setting or indication range	-0.2 bar \pm 0.1 bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	30 Nm
	Switching type	N/O contact (N/C as an option)
	Max. switching voltage	48 V
	Electrical connection	threaded connection
	Max. switching voltage at resistive load	60 W = 100 VA ~
	switching capacity	ohmic 2.5 A at 24 V = ohmic 2.5 A at 42 V ~
	Protection class to DIN 40050	IP 65, terminals IP 00
	Order example	VR 0.2 UF.1
		



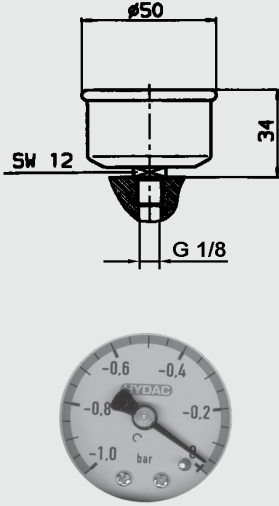

VRD x UF.x

	Type of indication	electrical switch
	Weight	154 g
	Pressure setting or indication range	-0.2 bar \pm 0.1 bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/O contact (N/C as an option)
	Max. switching voltage	48 V
	Electrical connection	threaded connection
	Max. switching voltage at resistive load	60 W = 100 VA ~
	switching capacity	ohmic 2.5 A at 24 V = ohmic 2.5 A at 42 V ~
	Protection class to DIN 40050	IP 65, terminals IP 00
	Order example	VRD 0.2 UF.1
		

VMF x UBM.x

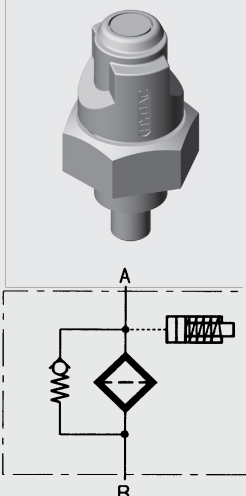
	Type of indication	visual, yellow pin	
	Weight	54 g	
	Pressure setting or indication range	-0.035 bar	
	Permitt. operating pressure	1 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	M10 x 1	
	Max. torque	2 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VMF 0.035 UBM.0	

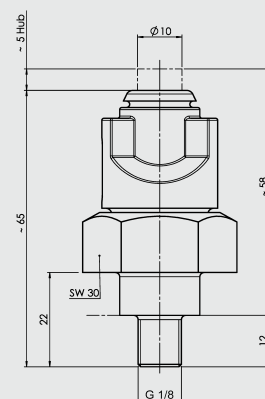
VMF x UED.x

 	Type of indication	visual-analogue, scale indication (filled with silicone oil)	 
	Weight	85 g	
	Pressure setting or indication range	-1 bar to 0 bar	
	Permitt. operating pressure	-0.7 to 0 bar continuous	
	Permitt. temperature range	-20 °C to +90 °C	
	Thread	G 1/8	
	Max. torque	10 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VMF 1 UED.0	

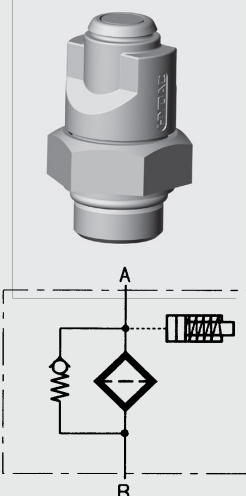
3.2 RETURN LINE INDICATORS

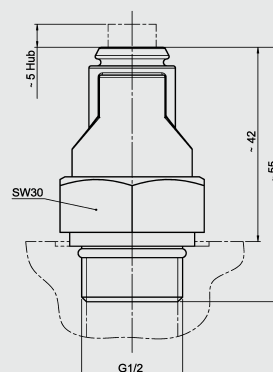
VMF x B.x

	Type of indication	visual, red pin
	Weight	81 g
	Pressure setting or indication range	2 bar -0.2 bar
	Permitt. operating pressure	7 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	VMF 2 B.1

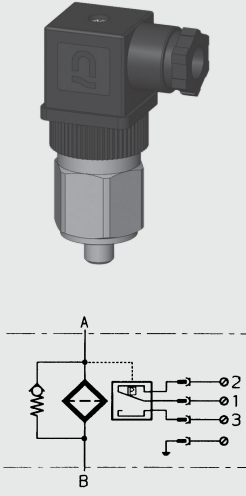



VR x B.x

	Type of indication	visual, red pin
	Weight	42 g
	Pressure setting or indication range	2 bar -0.2 bar
	Permitt. operating pressure	7 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/2
	Max. torque	15 Nm
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	VR 2 B.1






VMF x C.x

	Type of indication	electrical switch
	Weight	121 g
	Pressure setting or indication range	2 bar -0.3 bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	230 V
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	250 W = 300 VA ~
	switching capacity	Ohmic 6 A at 24 V = Ohmic 0.03 to 6 A at max. 230 V ~
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VMF 2 C.1






E 7.050.15/11.16




VR x C.x

 	Type of indication	electrical switch	
	Weight	192 g	
	Pressure setting or indication range	2 bar -0.3 bar	
	Permitt. operating pressure	40 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	N/C or N/O (change-over contacts)	
	Max. switching voltage	230 V	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	250 W = 300 VA ~	
	switching capacity	Ohmic 6 A at 24 V Ohmic 0.03 to 6 A at max. 230 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VR 2 C.1	

VRD x C.x

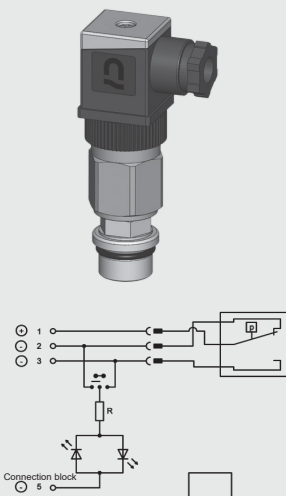

 	Type of indication	electrical switch	
	Weight	208 g	
	Pressure setting or indication range	2 bar -0.3 bar	
	Permitt. operating pressure	40 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	N/C or N/O (change-over contacts)	
	Max. switching voltage	230 V	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	250 W = 300 VA ~	
	switching capacity	Ohmic 6 A at 24 V Ohmic 0.03 to 6 A at max. 230 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VRD 2 C.1	

VMF x D.x /-L...

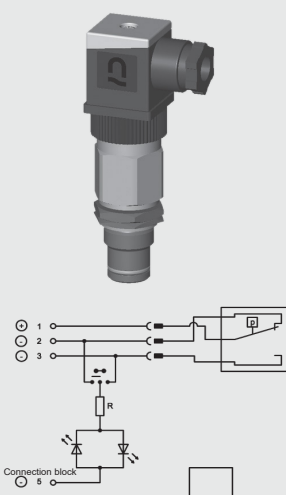

 	Type of indication	visual indicator and electrical switch	
	Weight	127 g	
	Pressure setting or indication range	2 bar -0.3 bar	
	Permitt. operating pressure	40 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/8	
	Max. torque	10 Nm	
	Switching type	N/C or N/O (change-over contacts)	
	Max. switching voltage	24, 48, 115, 230 V (depending on the type of light insert)	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	250 W = 300 VA ~	
	switching capacity	Ohmic 6 A at 230 V = Ohmic 0.03 to 6 A at max. 230 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VMF 2 D.1 /-L24	

E 7.050.15/11.16

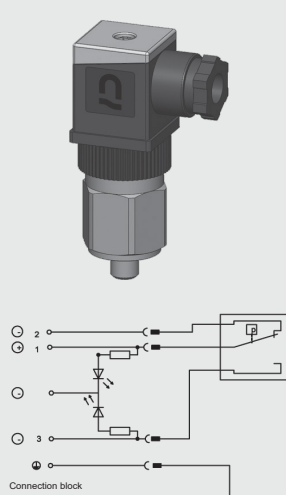

VR x D.x /-L...

	Type of indication	visual indicator and electrical switch	
	Weight	200 g	
	Pressure setting or indication range	2 bar -0.3 bar	
	Permitt. operating pressure	40 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	N/C or N/O (change-over contacts) 24, 48, 115,	
	Max. switching voltage	230 V (depending on the type of light insert)	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	250 W = 300 VA ~	
	switching capacity	Ohmic 6 A at 24 V = Ohmic 0.03 to 6 A at max. 230 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VR 2 D.1 /-L110	




VRD x D.x /-L...

	Type of indication	visual indicator and electrical switch	
	Weight	215 g	
	Pressure setting or indication range	2 bar -0.3 bar	
	Permitt. operating pressure	40 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	N/C or N/O (change-over contacts) 24, 48, 115,	
	Max. switching voltage	230 V (depending on the type of light insert)	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	250 W = 300 VA ~	
	switching capacity	Ohmic 6 A at 24 V = Ohmic 0.03 to 6 A at max. 230 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VRD 2 D.1 /-L110	




VMF x D.x /-LED

	Type of indication	visual indicator and electrical switch	
	Weight	120 g	
	Pressure setting or indication range	2 bar -0.3 bar	
	Permitt. operating pressure	40 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/8	
	Max. torque	10 Nm	
	Switching type	N/O contact	
	Max. switching voltage	24 V	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	250 W = 300 VA ~	
	switching capacity	Ohmic 6 A at 24 V =	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VMF 2 D.1 /-LED	





VR x D.x /-LED

 	Type of indication	visual indicator and electrical switch	
	Weight	191 g	
	Pressure setting or indication range	2 bar -0.3 bar	
	Permitt. operating pressure	40 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	N/O contact	
	Max. switching voltage	24 V	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	250 W = 300 VA ~	
	switching capacity	Ohmic 6 A at 24 V =	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VR 2 D.1 /-LED	

VRD x D.x /-LED





 	Type of indication	visual indicator and electrical switch	
	Weight	207 g	
	Pressure setting or indication range	2 bar -0.3 bar	
	Permitt. operating pressure	40 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	N/O contact	
	Max. switching voltage	24 V	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	250 W = 300 VA ~	
	switching capacity	Ohmic 6 A at 24 V =	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VRD 2 D.1 /-LED	

VMF x E.x





 	Type of indication	visual-analogue, scale indication	 
	Weight	54 g	
	Pressure setting or indication range	0 bar to +10 bar	
	Permitt. operating pressure	7 bar continuous	
	Permitt. temperature range	-20 °C to +60 °C	
	Thread	G 1/8	
	Max. torque	10 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VMF 2 E.0	

E 7.050.15/11.16





VMF 16 E.x

 	Type of indication	visual-analogue, scale indication	 
	Weight	55 g	
	Pressure setting or indication range	0 bar to +16 bar	
	Permitt. operating pressure	11 bar continuous	
	Permitt. temperature range	-20 °C to +60 °C	
	Thread	G 1/8	
	Max. torque	10 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VMF 16 E.0	






VR x E.x

 	Type of indication	visual-analogue, scale indication	 
	Weight	125 g	
	Pressure setting or indication range	0 bar to +10 bar	
	Permitt. operating pressure	7 bar continuous	
	Permitt. temperature range	-20 °C to +60 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VR 2 E.0	






VRD x E.x

 	Type of indication	visual-analogue, scale indication	 
	Weight	141 g	
	Pressure setting or indication range	0 bar to +10 bar	
	Permitt. operating pressure	7 bar continuous	
	Permitt. temperature range	-20 °C to +60 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VRD 2 E.0	






VMF x ES.x

 	Type of indication	visual-analogue, scale indication	  
	Weight	59 g	
	Pressure setting or indication range	0 bar to +10 bar	
	Permitt. operating pressure	7 bar continuous	
	Permitt. temperature range	-20 °C to +60 °C	
	Thread	G 1/8	
	Max. torque	10 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VMF 2 ES.0	

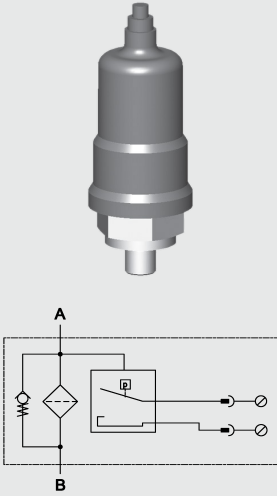
VR x ES.x

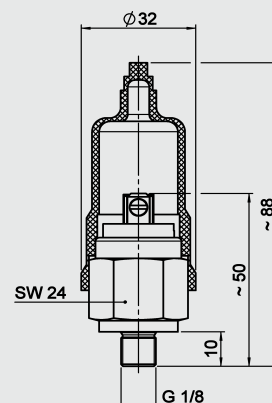
 	Type of indication	visual-analogue, scale indication	  
	Weight	130 g	
	Pressure setting or indication range	0 bar to +10 bar	
	Permitt. operating pressure	7 bar continuous	
	Permitt. temperature range	-20 °C to +60 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VR 2 ES.0	

VRD x ES.x

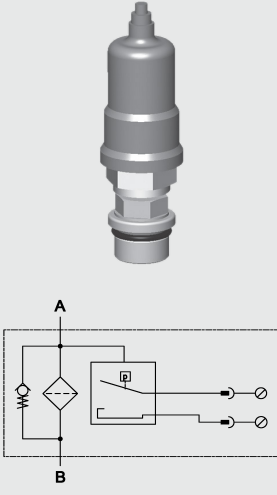
 	Type of indication	visual-analogue, scale indication	  
	Weight	146 g	
	Pressure setting or indication range	0 bar to +10 bar	
	Permitt. operating pressure	7 bar continuous	
	Permitt. temperature range	-20 °C to +60 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VRD 2 ES.0	

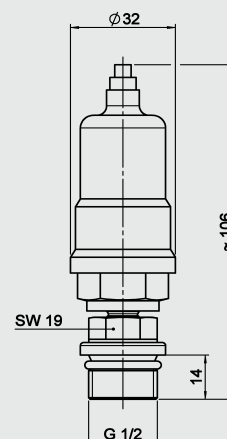
VMF x F.x

	Type of indication	electrical switch
	Weight	71 g
	Pressure setting or indication range	2 bar ± 0.3 bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	N/O contact (N/C as an option)
	Max. switching voltage	42 V
	Electrical connection	threaded connection
	Max. switching voltage at resistive load	60 W = 100 VA ~
	switching capacity	Ohmic 2.5 A at 24 V = Ohmic 2.5 A at 42 V ~
	Protection class to DIN 40050	IP 65, terminals IP 00
	Order example	VMF 2 F.0

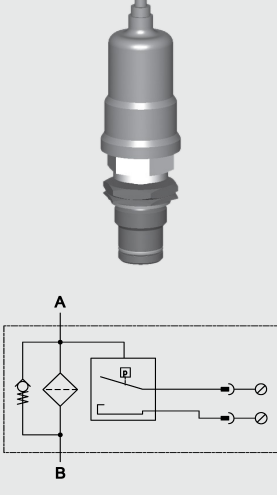


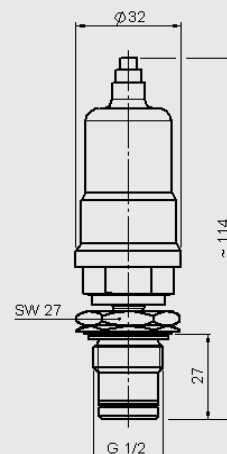
VR x F.x

	Type of indication	electrical switch
	Weight	142 g
	Pressure setting or indication range	2 bar ± 0.3 bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/O contact (N/C as an option)
	Max. switching voltage	42 V
	Electrical connection	threaded connection
	Max. switching voltage at resistive load	60 W = 100 VA ~
	switching capacity	Ohmic 2.5 A at 24 V = Ohmic 2.5 A at 42 V ~
	Protection class to DIN 40050	IP 65, terminals IP 00
	Order example	VR 2 F.0





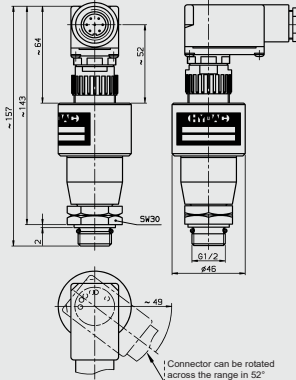
VRD x F.x

	Type of indication	electrical switch
	Weight	158 g
	Pressure setting or indication range	2 bar ± 0.3 bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/O contact (N/C as an option)
	Max. switching voltage	42 V threaded
	Electrical connection	connection
	Max. switching voltage at resistive load	60 W = 100 VA ~
	switching capacity	Ohmic 2.5 A at 24 V = Ohmic 2.5 A at 42 V ~
	Protection class to DIN 40050	IP 65, terminals IP 00
	Order example	VRD 2 F.1


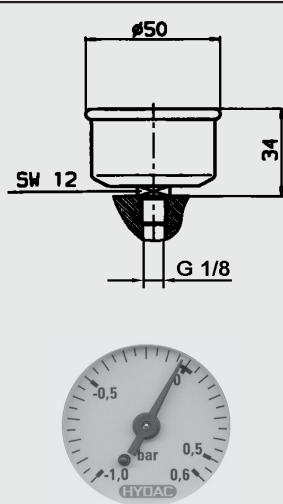


E 7.050.15/11.16


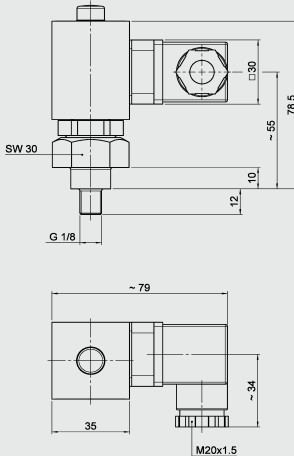
VR x GC.x

 	<table><tr><td>Type of indication</td><td>Electronic/analogue (4-20 mA or 1-10 V) 1 electrical switching contact at 75% and at 100% of the pressure setting Analogue signal up to 20% of the pressure setting constant 4mA or 1 V</td></tr><tr><td>Weight</td><td>340 g</td></tr><tr><td>Pressure setting or indication range</td><td>2 bar -10%</td></tr><tr><td>Permitt. operating pressure</td><td>7 bar</td></tr><tr><td>Permitt. temperature range</td><td>-10 °C to +80 °C</td></tr><tr><td>Thread</td><td>G 1/2</td></tr><tr><td>Max. torque</td><td>15 Nm</td></tr><tr><td>Switching type</td><td>N/C or N/O, electronic PNP positive switching (factory setting)</td></tr><tr><td>Max. switching voltage</td><td>Operating voltage 20-30 V DC</td></tr><tr><td>Electrical connection</td><td>7 pole plug to DIN 43651; PG 11</td></tr><tr><td>Max. switching voltage at resistive load</td><td>12 W</td></tr><tr><td>switching capacity</td><td>Ohmic 0.4 A at 30 V =</td></tr><tr><td>Protection class to DIN 40050</td><td>IP 65 (only if the connector is wired and fitted correctly)</td></tr><tr><td>Order example</td><td>VR 2 GC.0 /-LED-SQ-123</td></tr></table>	Type of indication	Electronic/analogue (4-20 mA or 1-10 V) 1 electrical switching contact at 75% and at 100% of the pressure setting Analogue signal up to 20% of the pressure setting constant 4mA or 1 V	Weight	340 g	Pressure setting or indication range	2 bar -10%	Permitt. operating pressure	7 bar	Permitt. temperature range	-10 °C to +80 °C	Thread	G 1/2	Max. torque	15 Nm	Switching type	N/C or N/O, electronic PNP positive switching (factory setting)	Max. switching voltage	Operating voltage 20-30 V DC	Electrical connection	7 pole plug to DIN 43651; PG 11	Max. switching voltage at resistive load	12 W	switching capacity	Ohmic 0.4 A at 30 V =	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	Order example	VR 2 GC.0 /-LED-SQ-123	
Type of indication	Electronic/analogue (4-20 mA or 1-10 V) 1 electrical switching contact at 75% and at 100% of the pressure setting Analogue signal up to 20% of the pressure setting constant 4mA or 1 V																													
Weight	340 g																													
Pressure setting or indication range	2 bar -10%																													
Permitt. operating pressure	7 bar																													
Permitt. temperature range	-10 °C to +80 °C																													
Thread	G 1/2																													
Max. torque	15 Nm																													
Switching type	N/C or N/O, electronic PNP positive switching (factory setting)																													
Max. switching voltage	Operating voltage 20-30 V DC																													
Electrical connection	7 pole plug to DIN 43651; PG 11																													
Max. switching voltage at resistive load	12 W																													
switching capacity	Ohmic 0.4 A at 30 V =																													
Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)																													
Order example	VR 2 GC.0 /-LED-SQ-123																													

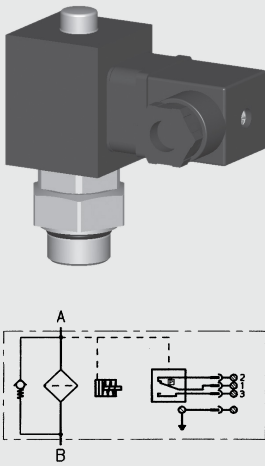
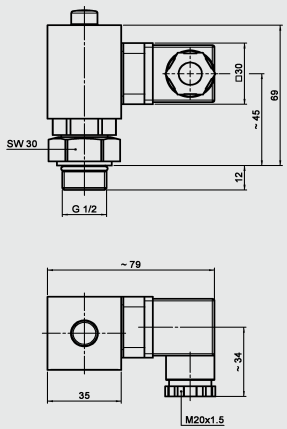
VMF x K.x

	Type of indication	visual-analogue, scale indication	
	Weight	54 g	
	Pressure setting or indication range	-1 bar to + 0.6 bar	
	Permitt. operating pressure	-0.7 to +0.4 bar continuous	
	Permitt. temperature range	-20 °C to +60 °C	
	Thread	G 1/8	
	Max. torque	10 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VMF 0.6 K.0	


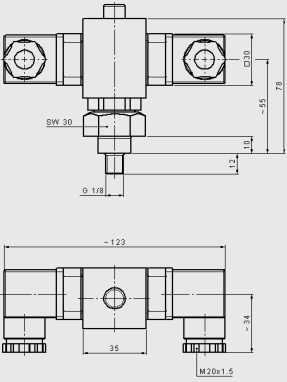
VMF x LE.x

	Type of indication	visual, red pin and electrical switch 1 switching contact at 100% of the pressure setting	
	Weight	176 g	
	Pressure setting or indication range	2 bar -0.2 bar	
	Permitt. operating pressure	7 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/8	
	Max. torque	10 Nm	
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts)	
	Max. switching voltage	115 V	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	15 W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VMF 2 LE.1	


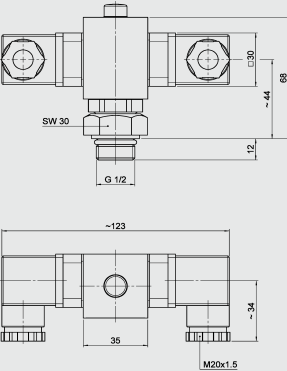
VR x LE.x

	Type of indication	visual, red pin and electrical switch 1 switching contact at 100% of the pressure setting	
	Weight	137 g	
	Pressure setting or indication range	2 bar -0.2 bar	
	Permitt. operating pressure	7 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	15 Nm	
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts)	
	Max. switching voltage	115 V	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	15 W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VR 2 LE.1	

VMF x LZ.x



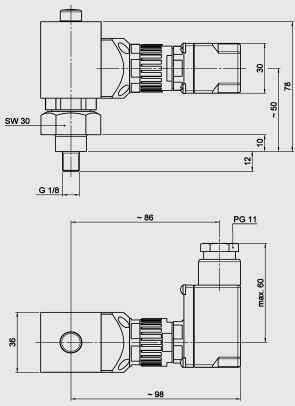
	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting	
	Weight	230 g	
	Pressure setting or indication range	2 bar -0.2 bar	
	Permitt. operating pressure	7 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/8	
	Max. torque	10 Nm	
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts)	
	Max. switching voltage	115 V	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	15 W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VMF 2 LZ.1	

VR x LZ.x



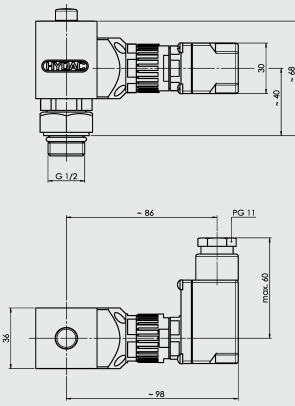
	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting	
	Weight	190 g	
	Pressure setting or indication range	2 bar -0.2 bar	
	Permitt. operating pressure	7 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	15 Nm	
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts)	
	Max. switching voltage	115 V	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	15 W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VR 2 LZ.1	

E 7.050.15/11.16



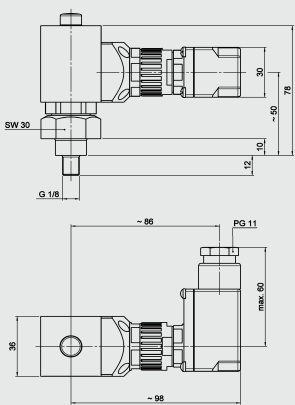
VMF x LZ.x /-DB

 	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting 1 green LED constantly lit 1 yellow LED lights from 75% 1 red LED lights from 100% Δp	
	Weight	170 g	
	Pressure setting or indication range	2 bar -0.2 bar	
	Permitt. operating pressure	7 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/8	
	Max. torque	10 Nm	
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts)	
	Max. switching voltage	24 V	
	Electrical connection	Male connection PG 11 Female connector to DIN 43651	
	Max. switching voltage at resistive load	15 W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VMF 2 LZ.1 /-DB	


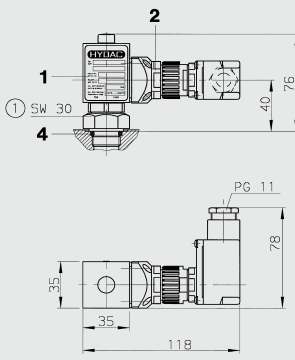

VR x LZ.x /-DB

 	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting 1 green LED constantly lit 1 yellow LED lights from 75% 1 red LED lights from 100% Δp	
	Weight	190 g	
	Pressure setting or indication range	2 bar -0.2 bar	
	Permitt. operating pressure	7 bar -10 °C to +100	
	Permitt. temperature range	°C G 1/2 15 Nm N/C or N/O contacts	
	Thread		
	Max. torque		
	Switching type	Reed contacts (change-over contacts)	
	Max. switching voltage	24 V Male connection PG 11 Female connector to DIN 43651 15 W = max. 15 VA ~	
	Electrical connection		
	Max. switching voltage at resistive load		
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VR 2 LZ.1 /-DB	




VMF x LZ.x /-CN

 	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting 1 green LED goes out at 75% 1 yellow LED lights from 75% 1 red LED lights from 100% Δp	
	Weight	170 g	
	Pressure setting or indication range	2 bar -0.2 bar	
	Permitt. operating pressure	7 bar	
	Permitt. temperature range	-10 °C to °C	
	Thread	G 1/8	
	Max. torque	10 Nm	
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts)	
	Max. switching voltage	24 V Male connection PG 11 Female connector to DIN 43651 15 W = max. 15 VA ~	
	Electrical connection		
	Max. switching voltage at resistive load		
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VMF 2 LZ.1 /-CN	




VR x LZ.x /-CN

	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting 1 red LED lights from 100% Δp	
	Weight	190 g	
	Pressure setting or indication range	2 bar -0.2 bar	
	Permitt. operating pressure	7 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	15 Nm	
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts)	
	Max. switching voltage	24 V	
	Electrical connection	Male connection PG 11 Female connector to DIN 43651	
	Max. switching voltage at resistive load	15 W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VR 2 LZ.1 /-CN	

VMF x LZ.x /-BO



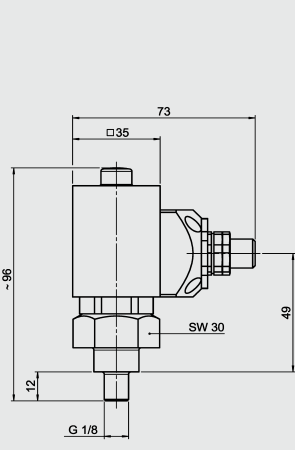
	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting	
	Weight	120 g	
	Pressure setting or indication range	2 bar (or 2.5 bar) -10%	
	Permitt. operating pressure	7 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/8	
	Max. torque	10 Nm	
	Switching type	N/C (75%) N/O (100%)	
	Max. switching voltage	24 V	
	Electrical connection	Male connection M12 x 1	
	Max. switching voltage at resistive load	15 W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65	
	Order example	VMF 2 LZ.1 /-BO	

VR x LZ.x /-BO



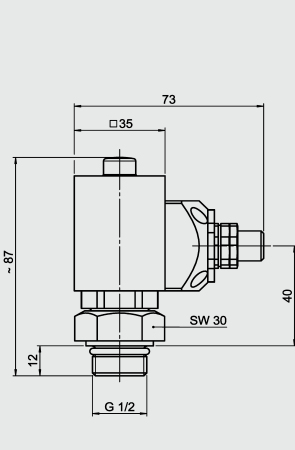
	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting	
	Weight	145 g	
	Pressure setting or indication range	2 bar (or 2.5 bar) -10%	
	Permitt. operating pressure	7 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	15 Nm	
	Switching type	N/O (75%) N/C (100%)	
	Max. switching voltage	24 V	
	Electrical connection	Male connection M12 x 1	
	Max. switching voltage at resistive load	15 W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65	
	Order example	VR 2 LZ.1 /-BO	

E 7.050.15/11.16





VMF x LZ.x /-AV

 <p>A</p>  <p>B</p>	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting	
	Weight	120 g	
	Pressure setting or indication range	2 bar (or 2.5 bar) -10%	
	Permitt. operating pressure	7 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/8	
	Max. torque	10 Nm	
	Switching type	N/C (75% and 100%)	
	Max. switching voltage	24 V	
	Electrical connection	Male connection M12 x 1	
	Max. switching voltage at resistive load	15 W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65	
	Order example	VMF 2 LZ.1 /-AV	

VR x LZ.x /-AV




 <p>A</p>  <p>B</p>	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting	
	Weight	145 g	
	Pressure setting or indication range	2 bar (or 2.5 bar) -10%	
	Permitt. operating pressure	7 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	15 Nm	
	Switching type	N/C (75% and 100%)	
	Max. switching voltage	24 V	
	Electrical connection	Male connection M12 x 1	
	Max. switching voltage at resistive load	15 W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65	
	Order example	VR 2 LZ.1 /-AV	

VMF x LZ.x /-D4C




 <p>A</p>  <p>B</p>	Type of indication	1 electrical switching contact at 75% and 100% of the pressure setting and suppression of the switching signal up to approx. 30 °C 2 green LED's light when below 30 °C 1 green LED lights from 30 °C 1 yellow LED lights from 75% 1 redLED lights from 100% Δp	 
	Weight	245 g	
	Pressure setting or indication range	2.5 bar -10%	
	Permitt. operating pressure	7 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/8	
	Max. torque	10 Nm	
	Switching type	N/O (75%) N/C (100%)	
	Max. switching voltage	24 V	
	Electrical connection	Male connection M12 x 1 15	
	Max. switching voltage at resistive load	W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65	
	Order example	VMF 2 LZ.2 /-D4C	

E 7.050.15/11.16




VR x LZ.x /-D4C

 	Type of indication	1 electrical switching contact at 75% and at 100% of the pressure setting and suppression of the switching signal up to approx. 30 °C. 2 green LED's light when below 30 °C 1 green LED lights from 30 °C 1 yellow LED lights from 75%	
	1 red LED lights from 100% Δp or indication range 2.5 bar -10% Permitt. operating pressure 7 bar Permitt. temperature range -10 °C to +100 °C Thread G 1/2 Max. torque 15 Nm Switching type N/O (75%)N/C (100%) Max. switching voltage 24 V Electrical connection Male connection M12 x 1 Max. switching voltage at resistive load 15 W = max. 15 VA ~ switching capacity Ohmic 1 A at 15 V =	Weight 205 g Pressure setting or indication range 2.5 bar -10% Permitt. operating pressure 7 bar Permitt. temperature range -10 °C to +100 °C Thread G 1/2 Max. torque 15 Nm Switching type N/O (75%)N/C (100%) Max. switching voltage 24 V Electrical connection Male connection M12 x 1 Max. switching voltage at resistive load 15 W = max. 15 VA ~ switching capacity Ohmic 1 A at 15 V =	
Protection class to DIN 40050		IP 65	
Order example		VR 2 LZ.2 /-D4C	




VMF x LZ.x /-BO-LED

 	Type of indication	1 electrical switching contact at 75% and at 100% of the pressure setting 1 green LED constantly lit 1 yellow LED lights from 75% 1 red LED lights from 100% Δp	
	Weight	245 g	
Pressure setting or indication range		2.5 bar -10%	
Permitt. operating pressure		7 bar -10 °C to +100 °C	
Permitt. temperature range		G 1/8 10 Nm N/O (75%),	
Thread		N/C (100%) 24 V Male	
Max. torque		connection M12 x 1	
Switching type			
Max. switching voltage			
Electrical connection			
Max. switching voltage at resistive load		15 W = max. 15 VA ~	
switching capacity		Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
Protection class to DIN 40050		IP 65	
Order example		VMF 2 LZ.2 /-BO-LED	




VR x LZ.x /-BO-LED

 	Type of indication	1 electrical switching contact at 75% and at 100% of the pressure setting 1 green LED constantly lit 1 yellow LED lights from 75% 1 red LED lights from 100% Δp	
	Weight	205 g	
Pressure setting or indication range		2.5 bar -10%	
Permitt. operating pressure		7 bar	
Permitt. temperature range		-10 °C to +100 °C	
Thread		G 1/2 15 Nm N/O (75%),	
Max. torque		N/C (100%) 24 V	
Switching type			
Max. switching voltage			
Electrical connection		Male connection M12 x 1	
Max. switching voltage at resistive load		15 W = max. 15 VA ~	
switching capacity		Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
Protection class to DIN 40050		IP 65	
Order example		VR 2 LZ.2 /-BO-LED	




VR x LZ.x /-GM

	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting Indicator function possible in conjunction with the "No element" indicator	
	Weight	290 g	
	Pressure setting or indication range	2.5 bar -10%	
	Permitt. operating pressure	7 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	15 Nm	
	Switching type	-	
	Max. switching voltage	24 V	
	Electrical connection	Male connection M12 x 1	
	Max. switching voltage at resistive load	15 W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65	
	Order example	VR 2 LZ.1 /-GM	

VMF x R.x

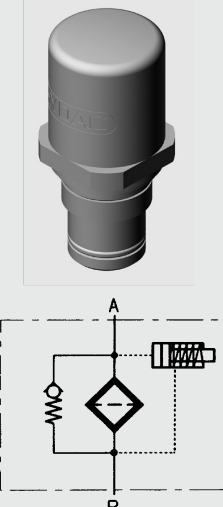

	Type of indication	visual-analogue, scale indication	
	Weight	54 g	
	Pressure setting or indication range	0 to 10 bar	
	Permitt. operating pressure	7 bar continuous	
	Permitt. temperature range	-20 °C to +60 °C	
	Thread	G 1/8	
	Max. torque	10 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VMF 2 R.0	

VR x R.x

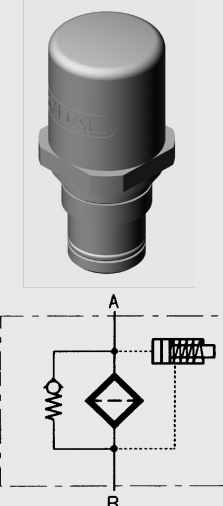
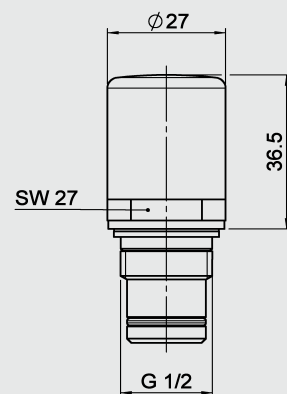
	Type of indication	visual-analogue, scale indication	
	Weight	125 g	
	Pressure setting or indication range	0 to 10 bar	
	Permitt. operating pressure	7 bar continuous	
	Permitt. temperature range	-20 °C to +60 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VR 2 R.0	

3.3 DIFFERENTIAL PRESSURE INDICATORS

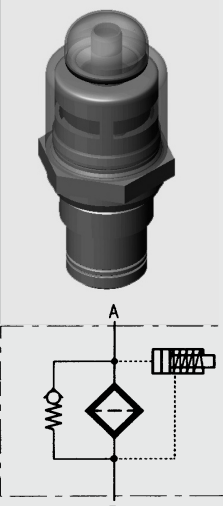

VM x B.x

	Type of indication	visual, red/green band Automatic reset	
	Weight	55 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	210 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VM 5 B.1	

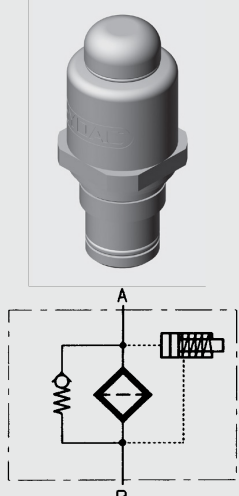
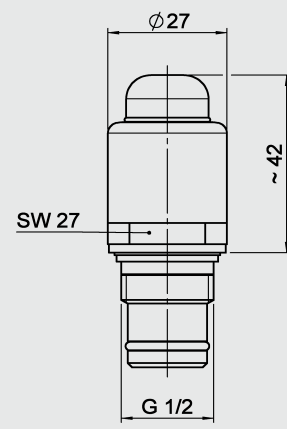
VD x B.x

	Type of indication	visual, red/green band Automatic reset	
	Weight	110 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	420 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	100 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VD 5 B.1	

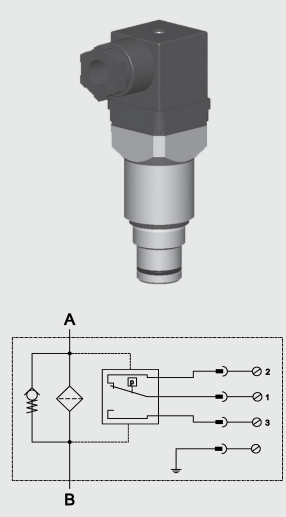
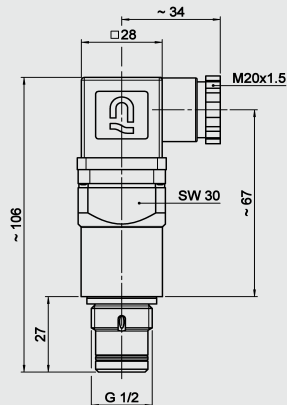
VM x BM.x

	Type of indication	visual, red/green band Manual reset	
	Weight	55 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	210 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VM 5 BM.1	

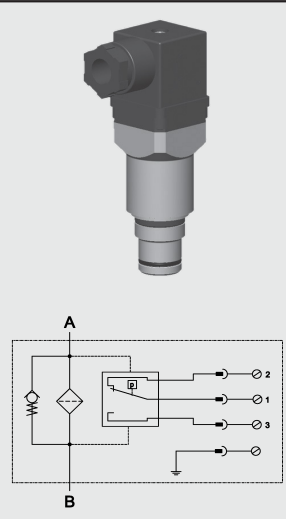
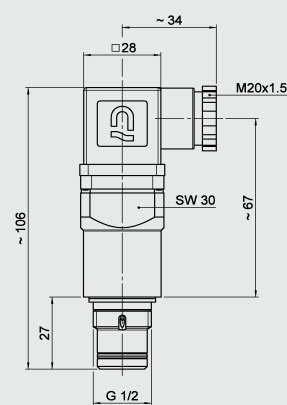
VD x BM.x

	Type of indication	visual, red/green band Manual reset	
	Weight	110 g	
	Pressure setting or indication range	2 bar -10 % 5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	420 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	100 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VD 5 BM.1	

VM x C.x

	Type of indication	electrical switch	
	Weight	120 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	210 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	N/C or N/O (change-over contacts)	
	Max. switching voltage	230 V	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	60 W = 100 VA ~	
	Switching capacity ¹⁾	Ohmic 3 A at 24 V = Ohmic 0.03 to 5 A at max. 230 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VM 5 C.0	



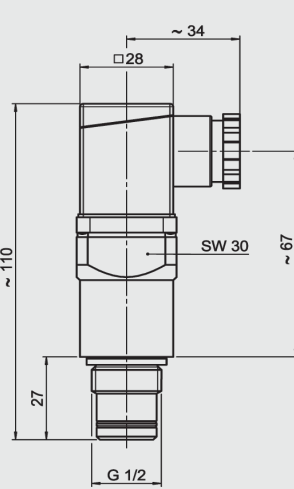
VD x C.x

	Type of indication	electrical switch	
	Weight	220 g	
	Pressure setting or indication range	5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	420 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	100 Nm	
	Switching type	N/C or N/O (change-over contacts)	
	Max. switching voltage	230 V	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	60 W = 100 VA ~	
	Switching capacity ¹⁾	Ohmic 3 A at 24 V = Ohmic 0.03 to 5 A at max. 230 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VD 5 C.0	



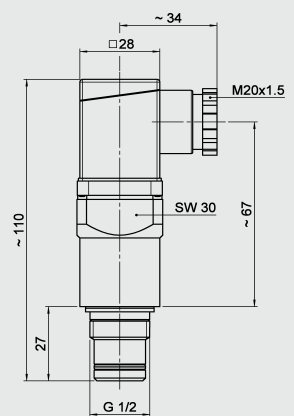
E 7.050.15/11.16

¹⁾ Required amperage > 20 mA; for lower amperages, order "-SO135" indicators (see Supplementary details).



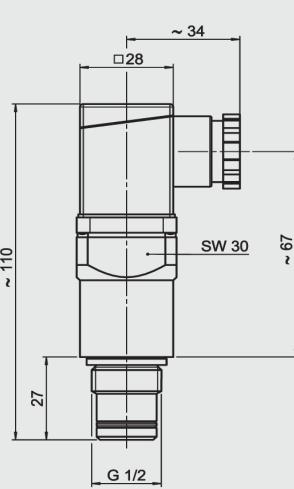
VM x D.x /-L...

 	Type of indication	visual indicator and electrical switch	
	Weight	150 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	210 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	N/C or N/O (change-over contacts)	
	Max. switching voltage	24, 48, 115, 230 V (depending on the type of light insert)	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	60 W = 100 VA ~	
	Switching capacity ¹⁾	Ohmic 3 A at 24 V = Ohmic 0.03 to 5 A at max. 230 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VM 5 D.0 /-L24	

VD x D.x /-L...

 	Type of indication	visual indicator and electrical switch	
	Weight	250 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	420 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	100 Nm	
	Switching type	N/C or N/O (change-over contacts)	
	Max. switching voltage	24, 48, 115, 230 V (depending on the type of light insert)	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	60 W = 100 VA ~	
	Switching capacity ¹⁾	Ohmic 3 A at 24 V = Ohmic 0.03 to 5 A at max. 230 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VD 5 D.0 /-L24	



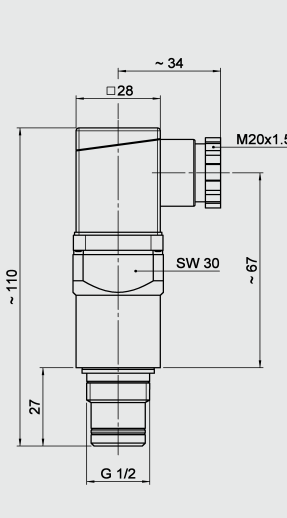
VM x D.x /-LED

 	Type of indication	visual indicator and electrical switch	
	Weight	150 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	210 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	N/C or N/O (change-over contacts)	
	Max. switching voltage	24 V	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	60 W = 100 VA ~ ohmic 3 A	
	Switching capacity ¹⁾	at 24 V =	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VM 5 D.0 /-LED	



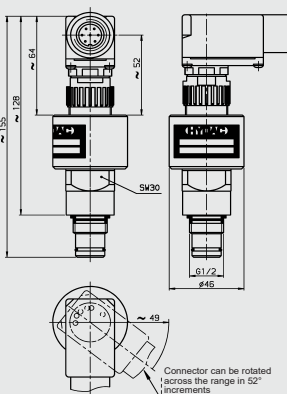
¹⁾ Required amperage > 20 mA; for lower amperages, order "-SO135" indicators (see Supplementary details).

E 7.050.15/11.16



VD x D.x /-LED




 	Type of indication	visual indicator and electrical switch	
	Weight	250 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	420 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	100 Nm	
	Switching type	N/C or N/O (change-over contacts)	
	Max. switching voltage	24 V	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	60 W = 100 VA ~	
	Switching capacity ¹⁾	ohmic 3 A at 24 V =	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VD 5 D.0 /-LED	

VD x GC.x

 	Type of indicator	Electronic/analogue (4-20 mA or 1-10 V) 1 electrical switching contact at 75% and at 100% of the pressure setting Analogue signal up to 20% of the pressure setting constant 4mA or 1 V	
	Weight	400 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%	
	Permitt. operating pressure	420 bar	
	Permitt. temperature range	-30 °C to +80 °C	
	Thread	G 1/2	
	Max. torque	100 Nm	
	Switching type	N/C or N/O, electronic PNP positive switching (factory setting)	
	Max. switching voltage	Operating voltage 20 to 30 V DC	
	Electrical connection	7 pole plug to DIN 43651; PG 11	
	Max. switching voltage at resistive load	12 W ohmic 0.4 A at	
	switching capacity	30 V =	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VD 5 GC.0 /-LED-SQ-123	

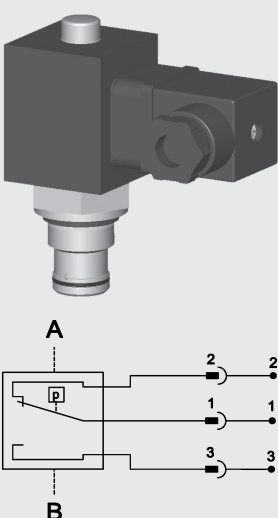
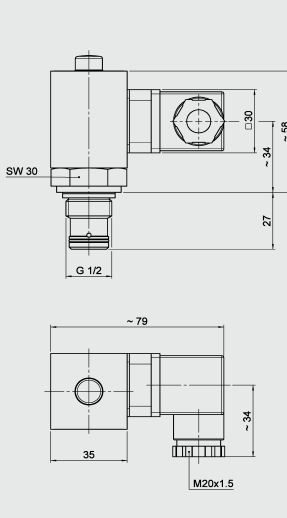
VL x GW.x

 	Type of indication	Electronic/analogue (4-20 mA) for condition monitoring filters incl. bypass monitoring. 1 switching contact at 75% and at 100% of the pressure setting		
	Weight	157 g		
	Pressure setting p (switching contact 100%)	2 bar ±5%	3 bar ±5%	5 bar ±5%
	Indication range Δp	0 to 5 bar	0 to 5 bar	0 to 8 bar
	Indication range "pressure before filter"	25 bar		
	Type of switching	electronic switch, PNP positive switching		
	switching outputs Δp	N/O or N/C contacts (factory setting)		
	Output Load	400 mA		
	Max. switching voltage / operating voltage	20 to 30 V DC		
	Analogue outputs "press. before filter" & Δp	4 to 20 mA (max. resistance 600Ω)		
	Electrical connection	M12 x 1 / 8 pole		
	Protection class to DIN 40050	IP 65		
	Permitt. operating pressure	25 bar		
	Permitt. temperature range	-40 °C to +85 °C		
	Thread	G 1/2		
	Max. torque	33 Nm		
	Order example	VL 5 GW.0 /-V-123		

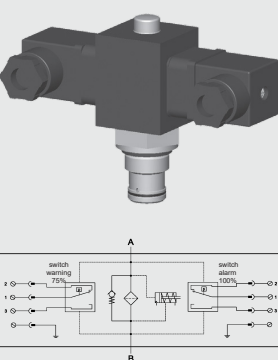
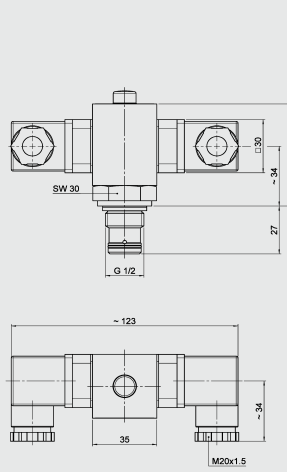


¹⁾ Required amperage > 20 mA; for lower amperages, order "-SO135" indicators (see Supplementary details).

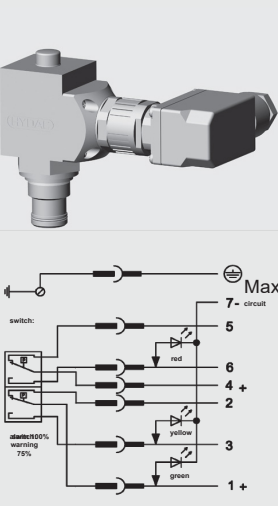
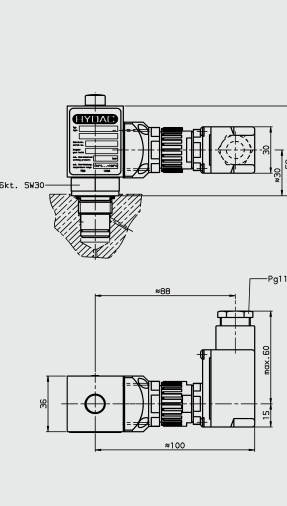
VD x LE.x

	Type of indication	visual, red pin and electrical switch 1 switching contact at 100% of the pressure setting	
	Weight	198 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%	
	Permitt. operating pressure	420 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	50 Nm	
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts)	
	Max. switching voltage	115 V	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	15 W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VD 5 LE.1	


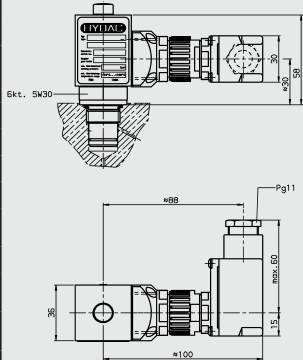

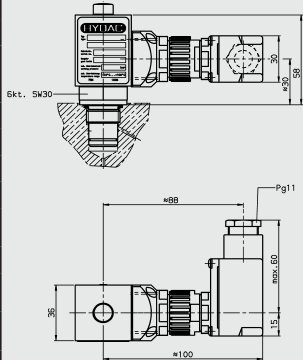
VD x LZ.x

	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting	
	Weight	240 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%	
	Permitt. operating pressure	420 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	50 Nm	
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts)	
	Max. switching voltage	115 V	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	15 W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VD 5 LZ.1	





VD x LZ.x /-DB

	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting 1 red LED lights from 100% Δp	
	Weight	245 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%	
	Permitt. operating pressure	420 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	50 Nm	
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts)	
	Max. switching voltage	24 V	
	Electrical connection	Male connection PG 11 Female connector to DIN 43651	
	Max. switching voltage at resistive load	15 W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VD 5 LZ.1 /-DB	





VD x LZ.x /-CN

	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting 1 green LED goes out at 75% 1 yellow LED lights from 75% 1 red LED lights from 100% Δp	
	Weight	245 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%	
	Permitt. operating pressure	420 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	50 Nm	
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts) 24 V	
	Max. switching voltage		
	Electrical connection	Male connection PG 11 Female connector to DIN 43651	
	Max. switching voltage at resistive load	15 W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VD 5 LZ.1 /-CN	

VD x LZ.x /-BO



	Type of indication	visual, red pin and one electrical switching contact at 75% and at 100% of the pressure setting	
	Weight	197 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%	
	Permitt. operating pressure	420 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	50 Nm	
	Switching type	N/O (75%) N/C (100%)	
	Max. switching voltage	24 V	
	Electrical connection	Male connection M12 x 1 15	
	Max. switching voltage at resistive load	W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65	
	Order example	VD 5 LZ.1 /-BO	

VD x LZ.x /-AV


	Type of indication	visual, red pin and one electrical switching contact at 75% and at 100% of the pressure setting	
	Weight	197 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%	
	Permitt. operating pressure	420 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	50 Nm	
	Switching type	N/C (100%)	
	Max. switching voltage	24 V (75% and 100%)	
	Electrical connection	Male connection M12 x 1	
	Max. switching voltage at resistive load	15 W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65	
	Order example	VD 5 LZ.1 /-AV	

E 7.050.15/11.16



VD x LZ.x /-D4C




Type of indicator	1 electrical switching contact at 75% and at 100% of the pressure setting and suppression of the switching signal when operating temperature is below 30 °C 2 green LEDs light when below 30 °C 1 green LED lights from 30 °C 1 yellow LED lights from 75% 1 red LED lights from 100% Δp
Weight	256 g
Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%
Permitt. operating pressure	420 bar
Permitt. temperature range	-10 °C to +100 °C
Thread	G 1/2
Max. torque	50 Nm
Switching type	N/O (75%) N/C (100%)
Max. switching voltage	24 V
Electrical connection	Male connection M12 x 1 15
Max. switching voltage at resistive load	W = max. 15 VA ~
switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
Protection class to DIN 40050	IP 65
Order example	VD 5 LZ.2 /-D4C





VD x LZ.x /-BO-LED




Type of indication	1 electrical switching contact at 75% and at 100% of the pressure setting 1 green LED constantly lit 1 yellow LED lights from 75% 1 red LED lights from 100% Δp
Weight	250 g
Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%
Permitt. operating pressure	420 bar
Permitt. temperature range	-10 °C to +100 °C
Thread	G 1/2
Max. torque	50 Nm
Switching type	N/O (75%) N/C (100%)
Max. switching voltage	24 V Male
Electrical connection	connection M12 x 1 15 W = max. 15 VA
Max. switching voltage at resistive load	~ Ohmic 1 A at 15 V =
switching capacity	Ohmic 1 A at 15 V ~
Protection class to DIN 40050	IP 65
Order example	VD 5 I.Z.2 /-BO-LED




V02 x V.x



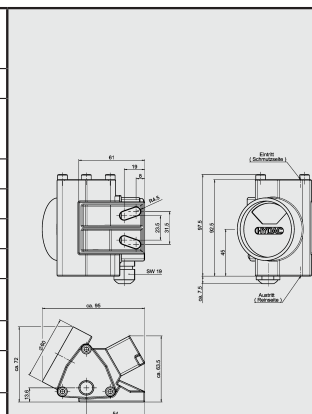
Type of indication	visual-analogue
Weight	580 g
Pressure setting or indication range	0.8 bar $\pm 10\%$ 2.0 bar $\pm 10\%$ 4.3 bar $\pm 10\%$
Permitt. operating pressure	100 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	G 1/4
Max. torque	-
Switching type	-
Max. switching voltage	-
Electrical connection	-
Max. switching voltage at resistive load	-
switching capacity	-
Protection class to DIN 40050	-
Order example	V02 2 V.0




V02 x VE.x



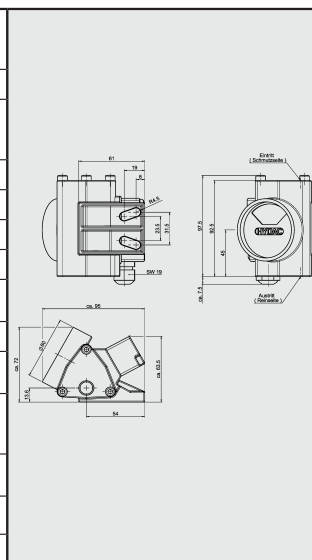
Type of indication	Visual/analogue indicator and electrical switching contact 100% of the pressure setting
Weight	640 g
Pressure setting or indication range	0.8 bar $\pm 10\%$ 2.0 bar $\pm 10\%$ 4.3 bar $\pm 10\%$
Permitt. operating pressure	100 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	G 1/4
Max. torque	-
Switching type	100% change-over contact
Max. switching voltage	250 V
Electrical connection	threaded connection M16 x 1.5
Max. switching voltage at resistive load	100% contact 30 W = 60 VA ~
switching capacity	Ohmic 2.5 A at 24 V = Ohmic 1 A at 220 V ~
Protection class to DIN 40050	IP 65
Order example	V02 2 VE.0



V02 x VZ.x




Type of indication	Visual/analogue indicator and 1 electrical switching contact at 75% and 100% of the pressure setting	
Weight	650 g	
Pressure setting or indication range	0.8 bar ±10% 2.0 bar ±10% 4.3 bar ±10%	
Permitt. operating pressure	100 bar	
Permitt. temperature range	-30 °C to +100 °C	
Thread	G 1/4	
Max. torque	-	
Switching type	75% - N/O contact 100% - change-over contact	
Max. switching voltage	250 V	
Electrical connection	threaded connection M16 x 1.5	
Max. switching voltage at resistive load	75% contact 120 W = 120 VA ~	100% contact 30 W = 60 VA ~
switching capacity	Ohmic 2.5 A at 24 V = Ohmic 1 A at 220 V ~	
Protection class to DIN 40050	IP 65	
Order example	V02 2 VZ.0	



3.4 MOBILE INDICATORS

3.4.1 RETURN LINE VMF x CM.x

	Type of indication	electrical switch
	Weight	90 g
	Pressure setting or indication range	2 bar ± 0.3 bar
	Permitt. operating pressure	10 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	24V
	Electrical connection	Male connection M12 x 1
	Max. switching voltage at resistive load	250 W = 300 VA ~
	switching capacity	Ohmic 6 A at 24 V = Ohmic 0.03 to 6 A at max. 230 V ~
	Protection class to DIN 40050	IP 67 (only if the connector is wired and fitted correctly)
	Order example	VMF 2 CM.1/-4M0



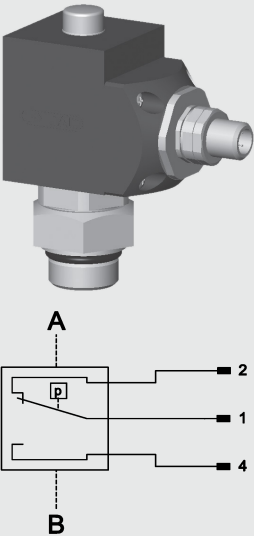

VMF x FD.x (plug connection: Deutsch DT 04-2P)

	Type of indication	electrical switch
	Weight	70 g
	Pressure setting or indication range	2 bar ± 0.3 bar
	Permitt. operating pressure	11 bar continuous
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	N/O or N/C
	Max. switching voltage	42 V
	Electrical connection	Deutsch DT 04-2P
	Max. switching voltage at resistive load	60 W = 100 VA ~
	switching capacity	Ohmic 2.5 A at 24 V = Ohmic 1 A at 220 V ~
	Protection class to DIN 40050	IP 67 (only if the connector is wired and fitted correctly)
	Order example	VMF 2 FD.0 /-2M0

VR x FD.x (plug connection: Deutsch DT 04-2P)


	Type of indication	electrical switch
	Weight	90 g
	Pressure setting or indication range	2 bar ± 0.3 bar
	Permitt. operating pressure	11 bar continuous
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/O or N/C
	Max. switching voltage	42 V
	Electrical connection	Deutsch DT 04-2P
	Max. switching voltage at resistive load	60 W = 100 VA ~
	switching capacity	Ohmic 2.5 A at 24 V = Ohmic 1 A at 220 V ~
	Protection class to DIN 40050	IP 67 (only if the connector is wired and fitted correctly)
	Order example	VR 2 FD.0 /-2M0


VR x LEM.x

	Type of indication	visual, red pin and electrical switch 1 switching contact at 100% of the pressure setting	
	Weight	140 g	
	Pressure setting or indication range	2 bar -0.2 bar	
	Permitt. operating pressure	7 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	15 Nm	
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts)	
	Max. switching voltage	24V	
	Electrical connection	Male connection M12 x 1	
	Max. switching voltage at resistive load	15 W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65	
	Order example	VR 2 LEM.1/-4M0	



3.4.2 DIFFERENTIAL PRESSURE

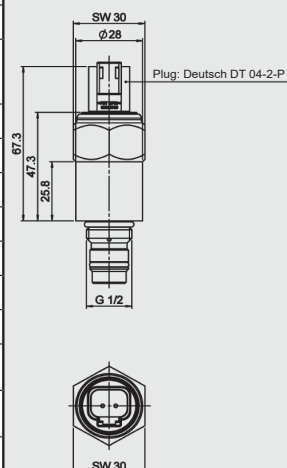
VL x BF.x

	Type of indication	visual
	Weight	25 g
	Pressure setting or indication range	1 bar -10% 2.5 bar -10%
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-10 °C to +80 °C
	Thread	M3; M4
	Max. torque	0.6 Nm
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	VL 2.5 BF.0





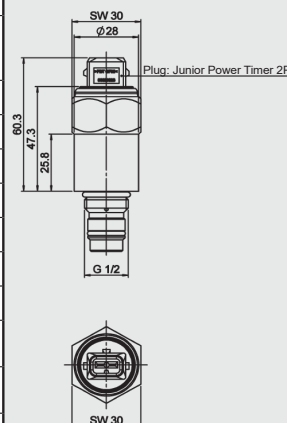
VM x CD.x (plug type: Deutsch DT 04-2P)

 	Type of indication	electrical switch
	Weight	100 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%
	Permitt. operating pressure	210 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/O or N/C
	Max. switching voltage	48 V
	Electrical connection	-
	Max. switching voltage at resistive load	60 W = 100 VA ~
	switching capacity	Ohmic 3 A at 24 V = Ohmic 0.03 to 5 A at max. 230 V ~
	Protection class to DIN 40050	IP 67 (only if the connector is wired and fitted correctly)
	Order example	VM 5 CD.0 /-2M0



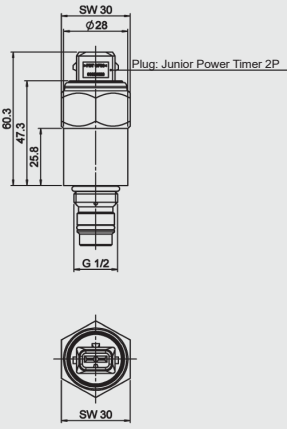


VM x CJ.x (plug type: Junior Power Timer)



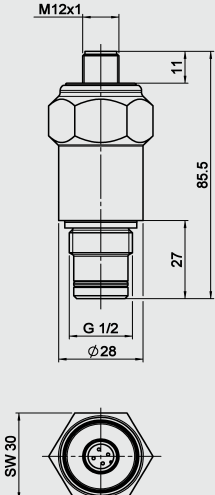
 	Type of indication	electrical switch
	Weight	100 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%
	Permitt. operating pressure	210 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/O or N/C
	Max. switching voltage	48 V
	Electrical connection	Junior Power Timer
	Max. switching voltage at resistive load	60 W = 100 VA ~
	switching capacity	Ohmic 3 A at 24 V = Ohmic 0.03 to 5 A at max. 230 V ~
	Protection class to DIN 40050	IP 54 (only if the connector is wired and fitted correctly)
	Order example	VM 5 CJ.0 /-2M0






VD x CJ.x (plug type: Junior Power Timer)

 	Type of indication	electrical switch	
	Weight	200 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	420 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	100 Nm	
	Switching type	N/O or N/C	
	Max. switching voltage	48 V	
	Electrical connection	Junior Power Timer	
	Max. switching voltage at resistive load	60 W = 100 VA ~	
	switching capacity	Ohmic 3 A at 24 V = Ohmic 0.03 to 5 A at max. 230 V ~	
	Protection class to DIN 40050	IP 54 (only if the connector is wired and fitted correctly)	
	Order example	VD 5 CJ.0 /-2M0	




VM x CM.x

 	Type of indication	electrical switch	
	Weight	70 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	210 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	N/C or N/O (change-over contacts)	
	Max. switching voltage	48 V	
	Electrical connection	Male connection M12 x 1	
	Max. switching voltage at resistive load	60 W = 100 VA ~	
	switching capacity	ohmic 2.5 A at 24 V = ohmic 2.5 A at 42 V ~	
	Protection class to DIN 40050	IP 67 (only if the connector is wired and fitted correctly)	
	Order example	VM 2 CM.0/-4M0	

VM x M.x

 	Type of indication	single pole (ground switching)	
	Weight	31 g	
	Pressure setting or indication range	2 bar ±15%	
	Permitt. operating pressure	210 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	N/O or N/C	
	Max. switching voltage	24V	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	terminals IP00	
	Order example	VM 2 M.0	



VD x LEM.x

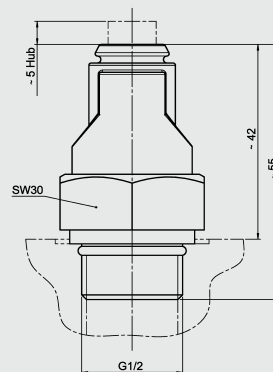
 	Type of indication	visual, red pin and electrical switch 1 switching contact at 100% of the pressure setting	
	Weight	350 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%	
	Permitt. operating pressure	420 bar	
	Permitt. temperature range	-10 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	50 Nm	
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts)	
	Max. switching voltage	24V	
	Electrical connection	Male connection M12 x 1	
	Max. switching voltage at resistive load	15 W = max. 15 VA ~	
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~	
	Protection class to DIN 40050	IP 65	
	Order example	VD 5 LEM.1/-4M0	

3.5 INDICATORS IN ACCORDANCE WITH ATEX DIRECTIVE



3.5.1 RETURN LINE

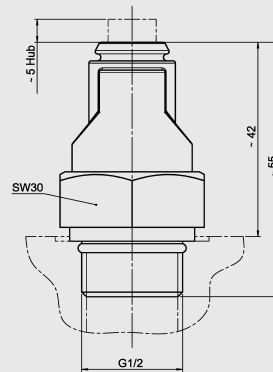
VR x B.x (ATEX) Can be used on aluminium filters up to Zone 1

 	Type of indication	visual, red pin
	Weight	44 g
	Pressure setting or indication range	2 bar -0.2 bar
	Permitt. operating pressure	7 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/2
	Max. torque	15 Nm
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	VR 2 B.0 /-2GC





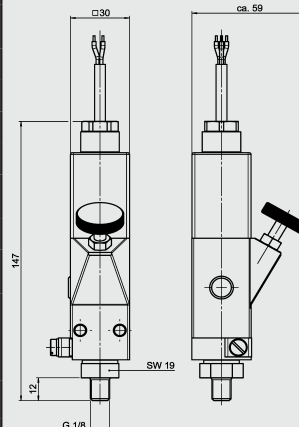
VR x B.x (ATEX) Can be used on steel/cast iron filters up to Zone 1

 	Type of indication	visual, red pin
	Weight	44 g
	Pressure setting or indication range	2 bar -0.2 bar
	Permitt. operating pressure	7 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/2
	Max. torque	15 Nm
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	VR 2 B.0 /-2GC-SO174



VMF x C.x /-Ex2G

 	Type of indication	electrical switch
	Weight	415 g
	Pressure setting or indication range	2 bar ±0.5 bar
	Permitt. operating pressure	200 bar
	Permitt. temperature range	-20 °C to +70 °C (T6)/-20 °C to +80 °C (T5)
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	250 V
	Electrical connection	Cable connection PG 9 Cable length 2 m
	Max. switching voltage at resistive load	62.5 W = 250 VA ~
	switching capacity	Ohmic 0.25 A at 250 V = Ohmic 1 A at 250 V ~
	Protection class to DIN 40050	IP 65
	ATEX designation	Ex II 2G EEx d IIC T6 / T5



VR x C.x /-Ex2G

	Type of indication	electrical switch	
	Weight	470 g	
	Pressure setting or indication range	2 bar \pm 0.5 bar	
	Permitt. operating pressure	40 bar	
	Permitt. temperature range	-20 °C to +70 °C (T6)/-20 °C to +80 °C (T5)	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	N/C or N/O (change-over contacts)	
	Max. switching voltage	250 V	
	Electrical connection	Cable connection PG 9 Cable length 2 m	
	Max. switching voltage at resistive load	62.5 W = 250 VA ~	
	switching capacity	Ohmic 0.25 A at 250 V = Ohmic 1 A at 250 V ~	
	Protection class to DIN 40050	IP 65	
	ATEX designation	II 2G Ex d IIC T6 / T5	
	Order example	VR 2 C.0 /-Ex2G	




VR x C.x (ATEX) Can be used on filters up to Zone 1 *

	Type of indication	electrical switch	
	Weight	340 g	
	Pressure setting or indication range	2 bar \pm 0.3 bar	
	Permitt. operating pressure	40 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	N/C or N/O (change-over contacts)	
	Max. switching voltage	*	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	*	
	switching capacity	*	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VR 2 C.1 /-2GBC	




* The clogging indicator is simple electrical operating equipment according to DIN EN 60079-14 and may only be used in intrinsically safe circuits (supplied with manufacturer's declaration and operating instructions).

3.5.2 DIFFERENTIAL PRESSURE



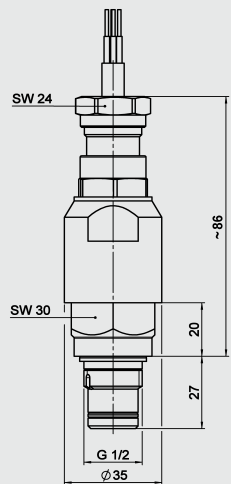
VM x B.x (ATEX) Can be used on aluminium filters up to Zone 1

 	Type of indication	visual, red/green band Automatic reset	
	Weight	110 g	
	Pressure setting or indication range	5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	210 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VM 5 B.1 /-2GC	



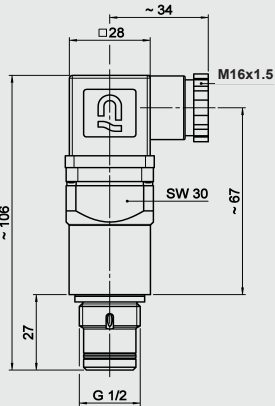
VD x B.x (ATEX) Can be used on filters up to Zone 1

 	Type of indication	visual, red/green band Automatic reset	
	Weight	110 g	
	Pressure setting or indication range	5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	420 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	100 Nm	
	Switching type	-	
	Max. switching voltage	-	
	Electrical connection	-	
	Max. switching voltage at resistive load	-	
	switching capacity	-	
	Protection class to DIN 40050	-	
	Order example	VD 5 B.1 /-2GC	



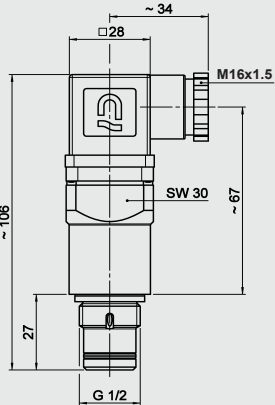
VD x C.x /-2GEXDIIC

 	Type of indication	electrical switch	
	Weight	from 600 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	420 bar	
	Permitt. temperature range	-20 °C to +60 °C (setting) (media temperature max. 75 °C)	
	Thread	G 1/2	
	Max. torque	100 Nm	
	Switching type	Change-over	
	Max. switching voltage	250 V	
	Electrical connection	Cable connection	
	Max. switching voltage at resistive load	60 W = 100 VA ~ ohmic 3 A at 24 V = ohmic 0.03 A to 5 A at 250 V ~	
	switching capacity		
	Protection class to DIN 40050	IP 66	
	ATEX designation	Ex II 2G Ex d IIC T6	
	Order example	VD 2 C.1 /-2GEXDIIC	

VM x C.x (ATEX) Can be used on aluminium filters up to Zone 1 *

 	Type of indication	electrical switch	
	Weight	120 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	210 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	N/C or N/O (change-over contacts)	
	Max. switching voltage	*	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	*	
	switching capacity	*	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VM 5 C.0 /-2GBC-SO135	

VD x C.x (ATEX) Can be used on filters up to Zone 1 *

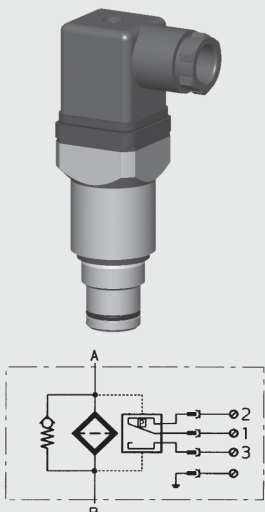
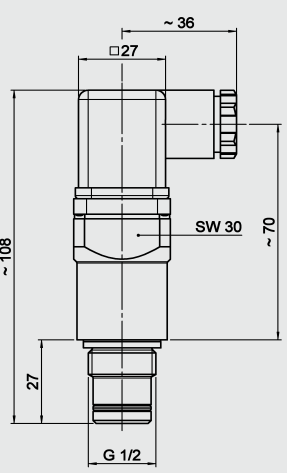
 	Type of indication	electrical switch	
	Weight	120 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	420 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	100 Nm	
	Switching type	N/C or N/O (change-over contacts)	
	Max. switching voltage	*	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	*	
	switching capacity	*	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VD 5 C.0 /-2GBC-SO135	

* The clogging indicator is simple electrical operating equipment according to DIN EN 60079-14 and may only be used in intrinsically safe circuits (supplied with manufacturer's declaration and operating instructions).

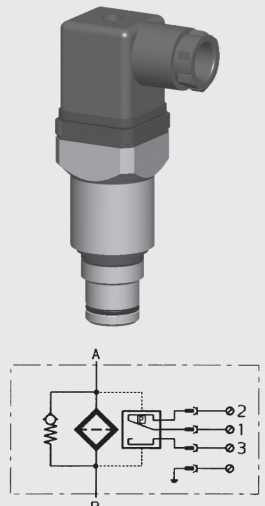
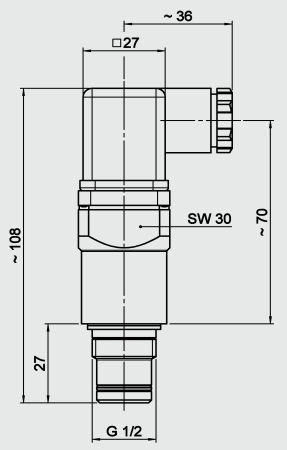
3.6 INDICATORS WITH UL OR CSA APPROVAL

3.6.1 DIFFERENTIAL PRESSURE

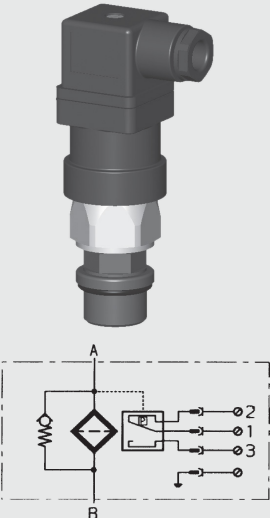
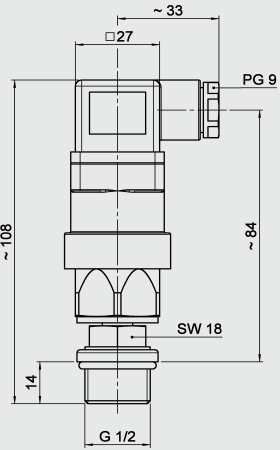
VM x C.x (UL, Standard 508)

	Type of indication	electrical switch	
	Weight	120 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	210 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	33 Nm	
	Switching type	N/C or N/O (change-over contacts)	
	Max. switching voltage	115 V	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	60 W = 100 VA ~	
	switching capacity	ohmic 3 A at 24 V =	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VM 5 C.0 /-CRUUS	

VD x C.x (UL, Standard 508)

	Type of indication	electrical switch	
	Weight	120 g	
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%	
	Permitt. operating pressure	420 bar	
	Permitt. temperature range	-30 °C to +100 °C	
	Thread	G 1/2	
	Max. torque	100 Nm	
	Switching type	N/C or N/O (change-over contacts)	
	Max. switching voltage	115 V	
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	60 W = 100 VA ~	
	switching capacity	ohmic 3 A at 24 V =	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VD 5 C.0 /-CRUUS	

3.6.2 RETURN LINE
VR x C.x (CSA)

	Type of indication	electrical switch	
	Weight	340 g	
	Pressure setting or indication range	2 bar -0.3 bar	
	Permitt. operating pressure	40 bar	
	Permitt. temperature range	-5 °C to +120 °C	
	Thread	G 1/2	
	Max. torque	30 Nm	
	Switching type	N/C or N/O (change-over contacts)	
	Max. switching voltage	230 V	
	Electrical connection	Male connection PG 9 Female connector to DIN EN 175301-803	
	Max. switching voltage at resistive load	250 W = 300 VA ~	
	switching capacity	ohmic 4 A at 24 V ohmic 0.3 to 4 A at max. 230 V ~	
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VR 2 C.0 /-CSA	

4. MODEL CODE

VR 2 D . X /-V-L24

4.1 STANDARD CLOGGING INDICATORS

Type

VMF return line indicator; connection G $\frac{1}{8}$
VR return line indicator; connection G $\frac{1}{2}$
VRD return line indicator; for differential pressure cavity
VM differential pressure indicator; up to 210 bar operating pressure
VD differential pressure indicator; up to 420 bar operating pressure
V differential pressure indicator; up to 25 bar operating pressure V02 differential pressure indicator; piped separately; up to 100 bar operating pressure

Pressure setting

see particular clogging indicator

Version

visual with automatic reset (for vertical installation only!) BF
visual, mobile
BM visual with manual reset
C electrical
CA electrical with AMP connector (Mark II)
CD electrical with Deutsch connector (DT 04-2P)
CJ electrical with AMP Junior Power Timer connector
CM electrical with M12x1 connector
CS electrical with AMP Superseal connector
D visual/electrical
pressure gauge, horizontal ES
pressure gauge, vertical
F pressure switch
FD pressure switch with Deutsch connector (DT 04-2P)
FJ pressure switch with AMP Junior Power Timer connector
FS pressure switch with AMP Superseal connector
GC electronic
GW electronic
K pressure gauge, horizontal
LE visual/mechanical with 100% switching contact
LEM visual/mechanical with 100% switching contact and M12x1 connector
LZ visual/mechanical with 75% and 100% switching contact
M electrical, earth-switching
R pressure gauge, horizontal
RS pressure gauge, vertical
UBM visual, negative pressure
UE negative pressure gauge, horizontal
UF negative pressure switch V visual/analogue VE
visual/analogue with 100% switching contact

VZ visual/analogue with 75% and 100% switching contact

Modification number

X the latest version is always supplied

Supplementary details 30C cold start suppression of switch

outputs up to 30 °C ± 5 °C

(only for C-, D-, LZ indicators; power supply only with direct current – max. 24 volts;

C and D indicators only for VD and VM; D and LZ indicators only as N/O contact)

L... lamp with appropriate voltage (24, 48, 110, 230 volts)

LED 2 light-emitting diodes up to 24 volts

OE N/C function

SO135 indicator suitable for PLC control via gold crosspoint contacts

W suitable for oil/water emulsions (HFA, HFC)

V seal made from Viton (FKM), suitable for phosphate ester fluid (HFD-R) and biodegradable oils

(must be specified for version "GW")

Addition: For VMF indicators B, LE, LZ and C/-EX2G a "/-V" must be added for a Viton version. For all other VMF versions, the standard is V and is not specified.

Supplementary details for "GC" type

113 N/O function pressure peak suppression up to 10 sec.
cold start suppression of switching outputs
(PNP technique, positive switching) up to 25 °C
123 N/C function pressure peak suppression up to 10 sec.
cold start suppression of switching outputs
(PNP technique positive switching) up to 25 °C

Must be specified!
Others on request

30C cold start suppression of switching outputs up to 30 °C (other temperatures on request)

LED 3 LEDs (green, yellow, red) in terminal box

PF floating switching outputs (due to relay in the plug)

SP analogue signal: voltage output 1-10 V

SQ analogue signal: voltage output 4 to 20 mA (current source)

if SP or SQ are not specified
"current sink" model supplied

Supplementary details to "GW" type

113 N/O function pressure peak suppression up to 10 sec. cold
start suppression of switching outputs (PNP
technique positive switching) up to 25 °C
123 N/C function pressure peak suppression up to 10 sec. cold
start suppression of switching outputs (PNP
technique positive switching) up to 25 °C

Must be specified!
Others on request

Supplementary details for "LZ" type

AV plug and connector to AUDI, VW specification
 BO plug and connector to BMW, Opel, Ford specification
 BO-LEDs for BO, but with progressive LED strip
 CN electrical connection, 1 connector DIN 43651 with 3 LEDs (to CNOMO specification NF E 48-700)
 DB electrical connection, 1 connector to DIN 43651 with 3 LEDs (to Daimler-Benz and BMW specification)
 D4C plug and connector to Daimler-Chrysler specification with cold start suppression 30 °C

Supplementary details to "ATEX" type











2GC for visual indicator type "B" with ATEX certificate
 2GBC for electrical indicator type "C" with ATEX certificate (the switch used in the indicator is a passive component according to EN 50020 and can therefore be used in intrinsically safe circuits as simple apparatus in accordance with EN 60079-14)
 2GEXDIIC for electrical indicator suitable for use in Zone 1 (Category 2), gas atmosphere, Category d (Flameproof Enclosure), Explosive subdivision IIC to ATEX directive
 EX2G Ex-protection type for the return line indicator type "C"





Supplementary details for "UL" and "CSA" approval

CRUUS for electrical differential indicator type "C" with UL approval
 CSA for electrical return line indicator type "C" with CSA approval

5. ADAPTERS

5.1 TYPES

	<table><tr><td>Designation</td><td>ADAPTER VD-D-S.0</td></tr><tr><td>Part no.</td><td>00318736</td></tr><tr><td>Description</td><td>Extending adapter for differential pressure cavity to HYDAC works standard HN 28-22</td></tr></table>	Designation	ADAPTER VD-D-S.0	Part no.	00318736	Description	Extending adapter for differential pressure cavity to HYDAC works standard HN 28-22	
Designation	ADAPTER VD-D-S.0							
Part no.	00318736							
Description	Extending adapter for differential pressure cavity to HYDAC works standard HN 28-22							
	<table><tr><td>Designation</td><td>ADAPTER VD-D+S.S.0</td></tr><tr><td>Part no.</td><td>00318732</td></tr><tr><td>Description</td><td>Y-adapter to convert 1 differential pressure cavity into 2 differential pressure cavities according to HYDAC works standard HN 28-22. Swivel-type on request!</td></tr></table>	Designation	ADAPTER VD-D+S.S.0	Part no.	00318732	Description	Y-adapter to convert 1 differential pressure cavity into 2 differential pressure cavities according to HYDAC works standard HN 28-22. Swivel-type on request!	
Designation	ADAPTER VD-D+S.S.0							
Part no.	00318732							
Description	Y-adapter to convert 1 differential pressure cavity into 2 differential pressure cavities according to HYDAC works standard HN 28-22. Swivel-type on request!							
	<table><tr><td>Designation</td><td>ADAPTER VD-1/4+1/4-W+W.0 /-00404337</td></tr><tr><td>Part no.</td><td>00404337</td></tr><tr><td>Description</td><td>Test adapter for different pressure cavity according to HYDAC works standard HN 28-22. To test the pressure before and after the filter element. Also available without minimes couplings (on request!)</td></tr></table>	Designation	ADAPTER VD-1/4+1/4-W+W.0 /-00404337	Part no.	00404337	Description	Test adapter for different pressure cavity according to HYDAC works standard HN 28-22. To test the pressure before and after the filter element. Also available without minimes couplings (on request!)	
Designation	ADAPTER VD-1/4+1/4-W+W.0 /-00404337							
Part no.	00404337							
Description	Test adapter for different pressure cavity according to HYDAC works standard HN 28-22. To test the pressure before and after the filter element. Also available without minimes couplings (on request!)							
	<table><tr><td>Designation</td><td>ADAPTER VR-R+R-S+S.0</td></tr><tr><td>Part no.</td><td>00318741</td></tr><tr><td>Description</td><td>Y-adapter to convert 1 return line cavity into 2 return line cavities (G 1/2) Swivel-type on request!</td></tr></table>	Designation	ADAPTER VR-R+R-S+S.0	Part no.	00318741	Description	Y-adapter to convert 1 return line cavity into 2 return line cavities (G 1/2) Swivel-type on request!	
Designation	ADAPTER VR-R+R-S+S.0							
Part no.	00318741							
Description	Y-adapter to convert 1 return line cavity into 2 return line cavities (G 1/2) Swivel-type on request!							
	<table><tr><td>Designation</td><td>ADAPTER V 1/4 I-D-S.0</td></tr><tr><td>Part no.</td><td>00318730</td></tr><tr><td>Description</td><td>Connection adapter for piping clogging indicators separately with differential pressure cavity according to HYDAC works standard HN 28-22. Two connections G 1/4 (one before and one after the filter element)</td></tr></table>	Designation	ADAPTER V 1/4 I-D-S.0	Part no.	00318730	Description	Connection adapter for piping clogging indicators separately with differential pressure cavity according to HYDAC works standard HN 28-22. Two connections G 1/4 (one before and one after the filter element)	
Designation	ADAPTER V 1/4 I-D-S.0							
Part no.	00318730							
Description	Connection adapter for piping clogging indicators separately with differential pressure cavity according to HYDAC works standard HN 28-22. Two connections G 1/4 (one before and one after the filter element)							

	Designation	ADAPTER VD-D+1/4+1/4-S+W+W.0	
	Part no.	00318744	
	Description	Extending adapter for differential pressure cavity according to HYDAC works standard HN 28-22. Also two connections, one before and one after the filter element.	
	Designation	ADAPTER VF-D-S.0 /-RT	
	Part no.	On request	
	Description	only for the following filters: LFR, LPFR, MDR, RFLR, RKMR, RMER, RMTR, RPER	

5.2 MODEL CODE (= EXAMPLE)

ADAPTER VD-D+1/4+1/4-S+W+W.X /-ESB

Connection

VD differential pressure indicator; connection G 1/2
VR return line indicator; connection G 1/2
V1/4 differential pressure indicator; connection G 1/4 internal
VF differential pressure indicator; flange type

Ports (several ports are possible!)

D differential pressure cavity G 1/2
R return line cavity G 1/2
MF cavity for pressure gauge and pressure switch
1/4 cavity G 1/4 for Minimes test points (M16 x 1.5)
1/8 cavity G 1/8 for Minimes test points (plug-in connection)

Orientation of the ports

S vertical
W horizontal

Type code

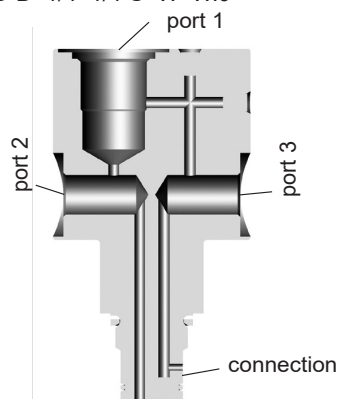
X the latest version is always supplied

Supplementary details

ESB swivel type

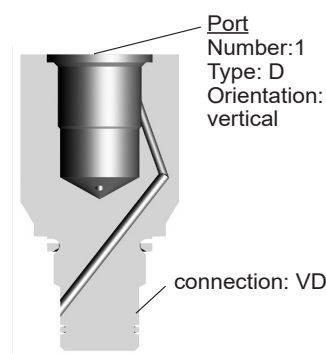
V seal in Viton (FPM), suitable for phosphate ester (HFD-R) and biodegradable oils

VD-D+1/4+1/4-S+W+W.0

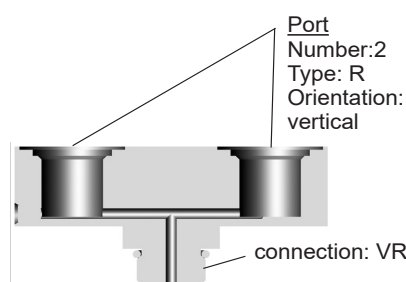


5.3 OTHER EXAMPLES

VD-D-S.0



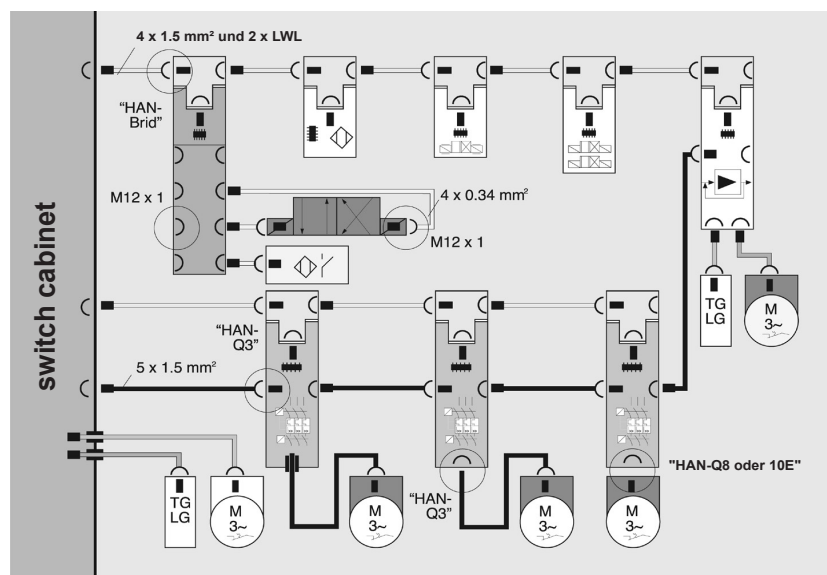
VR-R+R-S+S.0



6. DESINA SPECIFICATION

DESINA is a fully comprehensive system intended to bring standardization and decentralization to the field of fluid technology and to electrical installation of machinery and systems. The system engineering, automotive and supply industries have worked together to draw up specifications of the necessary components. DESINA makes use of tried-and-tested solutions, such as open bus systems, standard industrial plugs etc. By standardizing components, interfaces and connection systems, such as a hybrid field bus cable (Cu/LWL), a wide range of different field bus systems can be made compatible on a single physical base.

6.1. TOTAL CONCEPT FOR MACHINE TOOL INSTALLATION



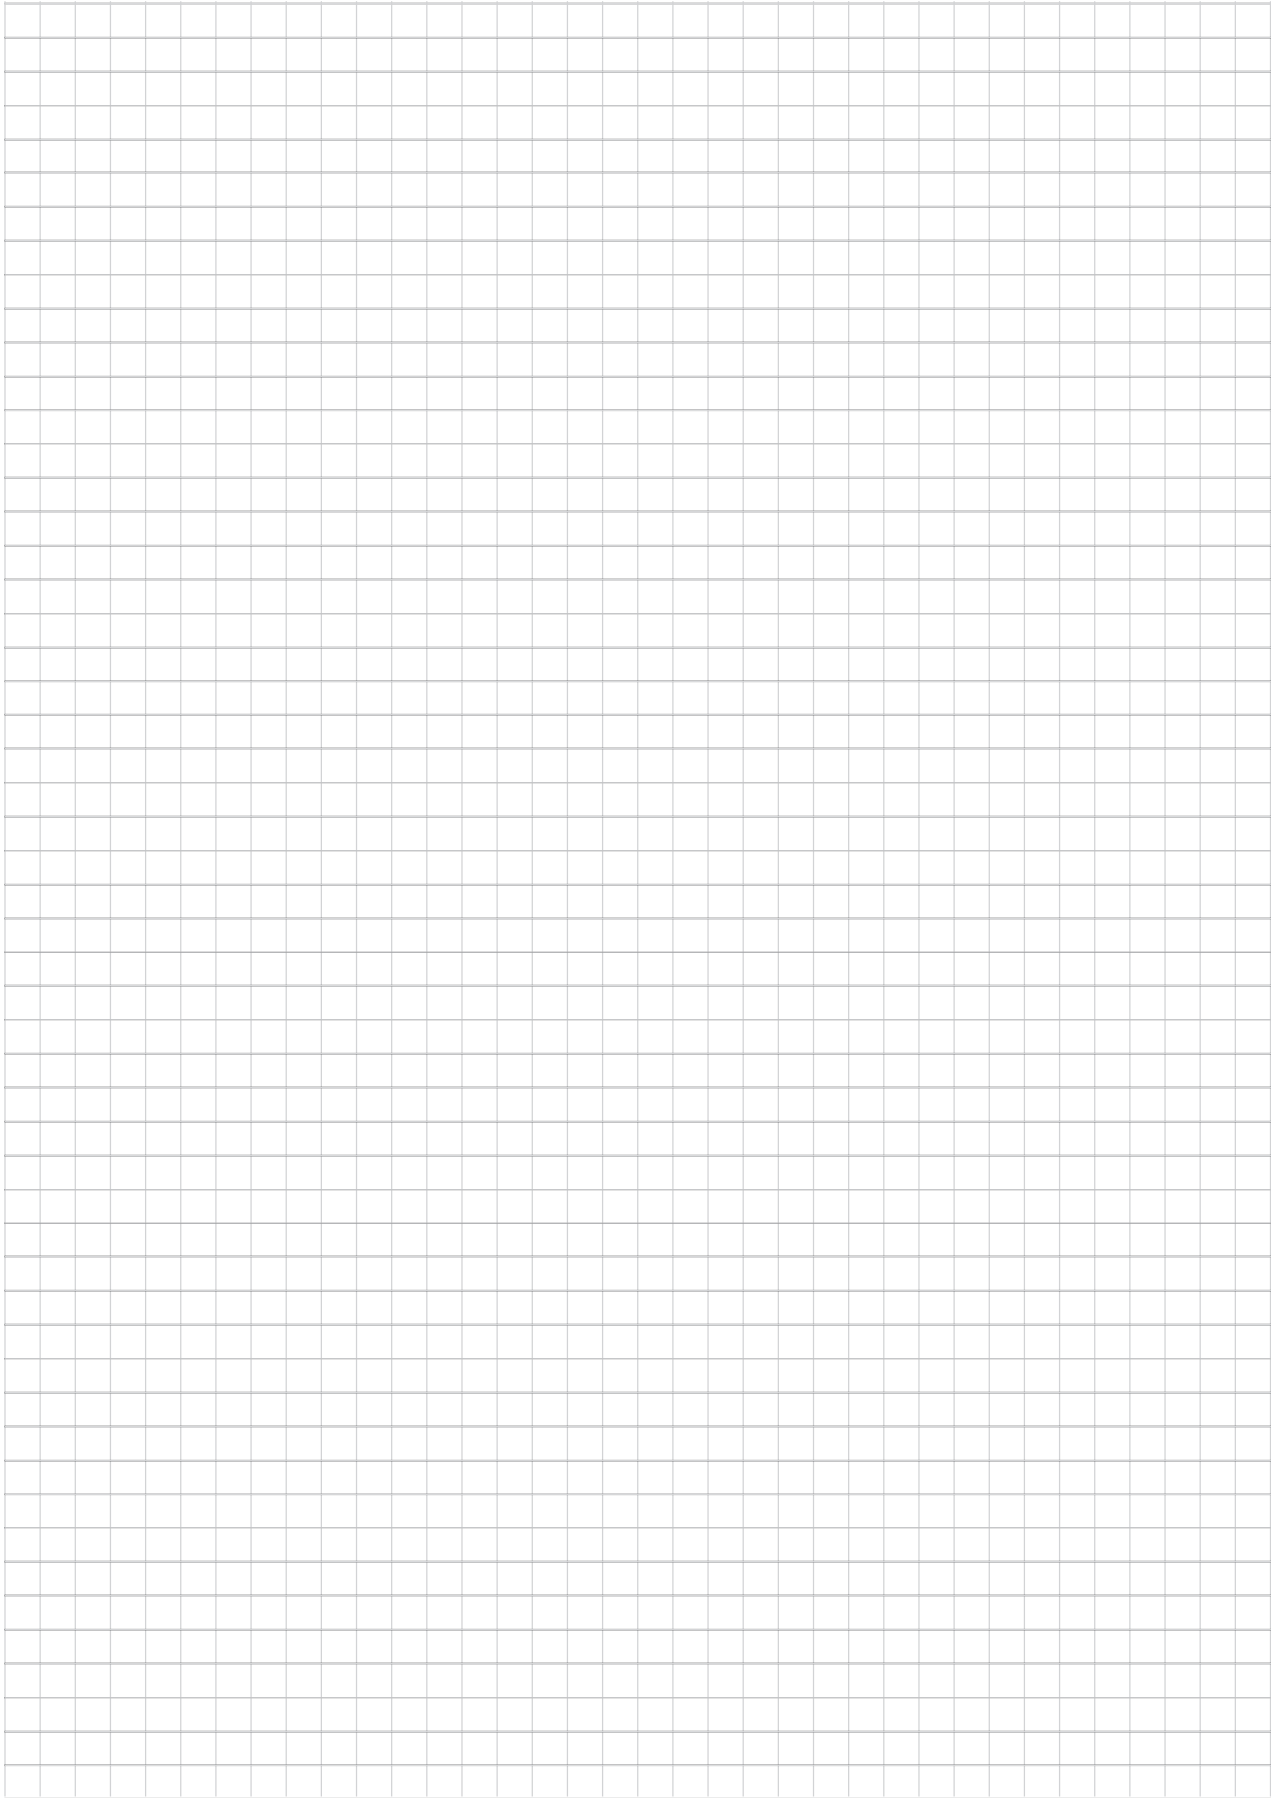
6.2. CLOGGING INDICATORS

The following clogging indicators are approved to DESINA specification:

VD 5 LZ.x /-D4C VR 2.5
LZ.x /-D4C VD 5 LZ.x /-BO
VR 2.5 LZ.x /-BO VD 5 LZ.x
/-AV VR 2.5 LZ.x /-AV VR
2.5 LZ.x /-GM all with M 12
x 1 connector!

**DESINA**

The DESINA logo is shown on the type code label of approved clogging indicators.



E 7.050.15/11.16

NOTE

The information in this brochure relates to the operating conditions and applications described.

For applications or operating conditions not described, please contact the relevant technical department.

Subject to technical modifications.

HYDAC Filtrertechnik GmbH
Industriegebiet
66280 Sulzbach/Saar, Germany
Tel.: +49 68 97 / 509-01
Fax: +49 68 97 / 509-300
Internet: www.hydac.com
E-Mail: filter@hydac.com

E 7.050.15/11.16